

Gear type flow meters
VC



KRACHT®


FLUID TECHNOLOGY AND SYSTEMS

Content

Construction Function General product characteristics Approvals	4
Sensor versions	5
General characteristics Accuracy characteristics	6
Typical applications	7
Technical data	8 - 10
Type key	11
Electrical connections Signal characteristics	12
Electrical characteristics	13
IO-Link	14
Explosion-proof version (ATEX/IECEX)	15
Pressure drop charts	16 - 22
VC technical drawings overview	23
VC technical drawings (dimensions/weights)	24 - 32
Connecting plate technical drawings (dimensions/weights)	33 - 35

Description

I Construction

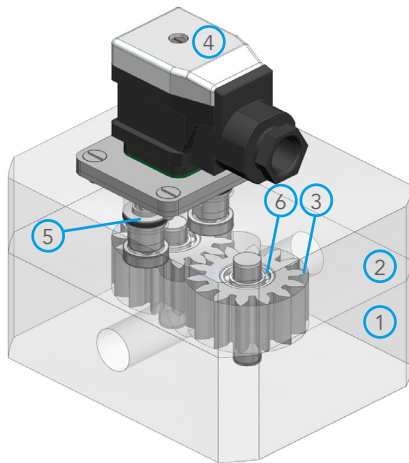


- 1 Housing
- 2 Cover
- 3 Gear
- 4 Plug
- 5 Sensor
- 6 Bearing

I General product characteristics

- High-precision measurements with excellent repeatability
- Maximal measurement resolution if used with encoder
- IO-Link technology available
- Wide measurement ranges with appropriate design sizes
- Application-optimised specification
- Low pressure drop
- Any flow direction
- Wide temperature range
- High working pressure
- Low noise emission
- Highly-dynamic measurements
- Explosion-proof versions ATEX/IECEX
- Electronics in EMV-compliant design
- RoHS-compliant

I Function

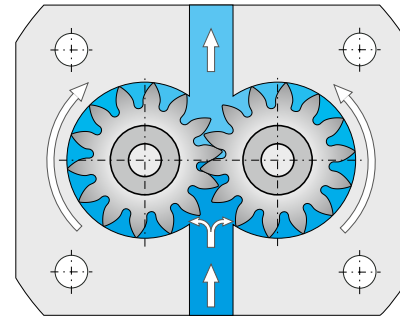

Consisting of two high-precision gears, the measuring unit is driven by the liquid flow based on the displacement principle. The gears run in an almost contactless manner in the measuring chamber. The bearing consists of ball and plain bearings.

Thanks to the measuring principle, there is no need for settling sections on the inlet and outlet side so that machines/plants can be designed to be more compact. All moving parts are lubricated by the measuring media.

The gear movement is scanned in a contactless manner by the lid-mounted sensors. During the rotation of the measuring unit by one tooth pitch, a signal is generated per sensor that corresponds to the so-called geometric tooth volume V_{gz} . The dual-channel scanning facilitates a higher measuring resolution and detection of the direction of flow.

Alternatively available encoder specifications deliver maximal measurement resolution.

Approvals

	Description	Country
	EU compliance – EMV – pressure equipment – RoHS	European Union
	EAC EMV guideline	Eurasian Economic Community
	GOST metrology, measurement technology	Russia
	IO-Link	International

Description

I Standard version



The standard versions come with an integrated pre-amplifier which converts the pulses from the magnetic sensors into square-wave signals which are then computed by an electronics into specific measurement values.

The optionally available remote-electronics version is designed to handle extreme temperature ranges.

I Encoder version with maximised measurement resolution



Compared with standard sensors, encoders are capable of generating considerably more pulses, thus increasing measurement resolution by orders of magnitude. Encoder-equipped SVC flow meters generate up to 2 500 pulses per revolution and can recognise the direction of flow.

Encoders, like the standard versions, send square-wave signals to the electronics.

I IO-Link version with internal calculation of measured values



VC flow meters with IO-Link technology are based on standard VCs with one or two sensors. Unlike standard or encoder versions which always send a square-wave signal to the electronics, IO-Link devices have the added capability of internally computing concrete measurement values. Therefore, these flow meters lend themselves for use in classic PLC and in IO-Link infrastructures.

Please see page 14 for details.

Technical data


I General characteristics

Nominal sizes	0.025 · 0.04 · 0.1 · 0.2 · 0.4 · 1 · 3 · 5 · 12 · 16
Type of connection	plate mounting (P) / pipe connection (R)
Mounting position	any
Flow direction	any
Typical measurement accuracy	+/- 0.3% from a viscosity of 20 cSt
Maximum pressure	0.025 · 0.04 · 0.1 · 0.2 · 0.4 · 1 · 12 · 16 ... 480 bar / 6962 psi 3 · 5 ... 480 bar / 6962 psi in K3 specification (in all other cases ... 350 bar / 5076 psi)
Maximum permissible pressure loss	16 bar / 232 psi
Ambient temperature	-60 ... 150 °C / -76 ... 302 °F
Media temperature	-60 ... 210 °C / -76 ... 410 °F
Viscosity	... 2 500 000 cSt
Sound pressure level	... 65 dB(A)

I Accuracy characteristics

- The indicated measurement accuracy refers to the pulse volume, i.e. the percentage variance applies to the latest measurement value.
- The measurement accuracy is up to +/- 0.3% of the measured value by default.
- Repeatability is +/- 0.05% in stable conditions.
- The measurement accuracy tests performed can be traced to DAkkS (Deutsche Akkreditierungsstelle, German Accreditation Body).
- The measurement accuracy characteristics indicated by KRACHT is confirmed by DAkkS.
- A calibration is possible on request. The result of this calibration will be documented in the form of a measurement accuracy characteristic.

Typical measurement accuracy characteristic

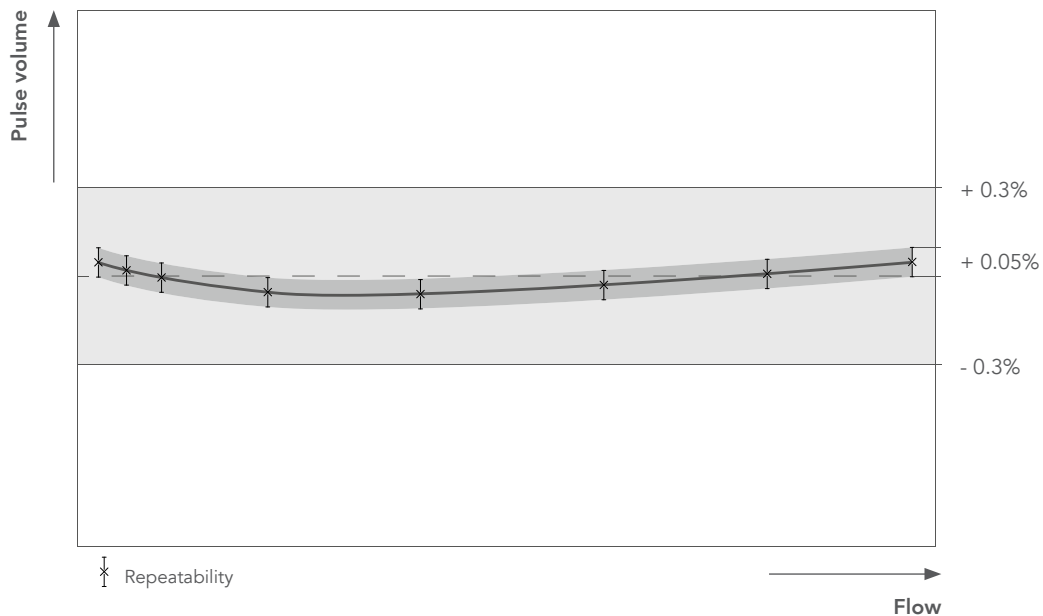

Technical data

I Application examples

Specifications (type key ID for bearing and material)	Typical media	Typical media characteristics	Typical application of the flow/ volume measurement
K1	Oil Braking fluid Diesel Skydrol	lubricating fluids low to medium viscosity	Hydraulic systems Test bench construction Cylinder stroke measurement
C1	Gear oil	lubricating fluids medium viscosity	oil filling (metering systems)
G1	offset ink polyol isocyanate glue resin silicone	lubricating fluids medium to high viscosity	consumption measuring (printing machines)
G2	polyol isocyanate glue resin silicone	poor lubricating fluids medium to high viscosity	Ratio control (2-component systems)
K2	clear varnish cavity sealing wax	lubricating fluids low to medium viscosity	dosing control (paint-spray lines) test bench construction
H2	urea (adBlue) solvents petrol	poor lubricating fluids low viscosity	flow measurement (paint-spray lines) test bench construction dosing
K3	oil braking fluid diesel Skydrol	lubricating fluids low viscosity	applications of up to 480 bar / 6962 psi for for nominal sizes 3, 5, 12 and 16
K4	oil diesel water	low viscosity	flow measurement

Technical data

I Overview

Specifications (type key ID for bearing and material)	K1	K2	G1	G2	C1	H2	K3	K4
Bearing	ball bearing	ball bearing	carbide plain bearing	carbide plain bearing	ball bearing (high tolerance)	hybrid ball bearing	ball bearing	ball bearing
Material: housing	spheroidal cast iron GJS-400-15	stainless steel 1.4404	spheroidal cast iron GJS-400-15	stainless steel 1.4404	spheroidal cast iron GJS-400-15	stainless steel 1.4404	spheroidal cast iron GJS-600	aluminium 3.2315
Material: gears	steel 1.7131	stainless steel 1.4462	steel 1.7131	stainless steel 1.4462	steel 1.7131	stainless steel 1.4462	steel 1.7131	stainless steel 1.4462
Type of connection	P	P / R	P	P / R	P	P / R	P	R
Permissible particle size in pumped media	20 µm	20 µm	30 µm	30 µm	30 µm	20 µm	20 µm	20 µm
Media temperature* in °C °F	-40 ... 210 -40 ... 410	-60 ... 210 -76 ... 410	-40 ... 80 -40 ... 176	-40 ... 80 -40 ... 176	-40 ... 210 -40 ... 410	-40 ... 210 -40 ... 410	-40 ... 210 -40 ... 410	-10 ... 80 -14 ... 176
Maximum pressure in bar / psi	480 / 6962	480 / 6962	480 / 6962	480 / 6962	480 / 6962	480 / 6962	480 / 6962	200 / 2901

* See selection guide on page 10

I Available electronics versions

Standard	•	•	•	•	•	•	•	•
High-temperature	•	•	–	–	•	•	•	–
ATEX	•	•	•	•	•	•	•	•
IO-Link	•	•	•	•	•	•	•	•
Encoder	•	–	•	–	–	–	–	–
High-temperature PLUS	•	•	–	–	–	•	•	–
ATEX high-temperature PLUS	•	•	–	–	–	•	•	–
Low-temperature	–	•	–	–	–	–	–	–

I Operating characteristics

Nominal size	Starting point	Measuring range							
	l/min gpm	l/min gpm							
0.025	0.001	0.008 ... 2	0.008 ... 2	–	0.02 ... 2/ 0.0053 ... 0.5283	–	0.008 ... 2	–	–
	0.0003	0.0021 ... 0.5283	0.0021 ... 0.5283	–	–	–	0.0021 ... 0.5283	–	–
0.04	0.004	0.02 ... 4	0.02 ... 4	–	–	–	0.02 ... 4	–	–
	0.0011	0.0053 ... 1.0567	0.0053 ... 1.0567	–	–	–	0.0053 ... 1.0567	–	–
0.1	0.008	0.04 ... 8	0.04 ... 8	0.04 ... 8	0.04 ... 8	–	0.04 ... 8	–	–
	0.0021	0.0106 ... 2.1134	0.0106 ... 2.1134	0.0106 ... 2.1134	0.0106 ... 2.1134	–	0.0106 ... 2.1134	–	–
0.2	0.01	0.16 ... 16	0.16 ... 16	0.16 ... 16	0.16 ... 16	0.16 ... 16	0.16 ... 16	–	0.2 ... 12
	0.0026	0.0422 ... 4.2268	0.0422 ... 4.2268	0.0422 ... 4.2268	0.0422 ... 4.2268	0.0422 ... 4.2268	0.0422 ... 4.2268	–	0.0528 ... 3.1701
0.4	0.01	0.2 ... 40	–	0.2 ... 30	0.2 ... 30	–	–	–	–
	0.0026	0.0528 ... 10.567	–	0.0053 ... 7.9252	0.0053 ... 7.9252	–	–	–	–
1	0.02	0.4 ... 80	0.4 ... 80	0.3 ... 60	0.3 ... 60	0.4 ... 80	0.4 ... 80	–	–
	0.0053	0.1057 ... 21.134	0.1057 ... 21.134	0.0793 ... 15.8503	0.0793 ... 15.8503	0.1057 ... 21.134	0.1057 ... 21.134	–	–
3	0.03	0.6 ... 160*	0.6 ... 160*	0.6 ... 100*	0.6 ... 100*	0.6 ... 160*	0.6 ... 160*	0.6 ... 160	–
	0.0079	0.1585 ... 42.268*	0.1585 ... 42.268*	0.1585 ... 26.417*	0.1585 ... 26.417*	0.1585 ... 42.268*	0.1585 ... 42.268*	0.1585 ... 42.268	–
5	0.04	1 ... 250*	1 ... 250*	1 ... 160*	1 ... 160*	1 ... 250*	1 ... 250*	1 ... 250	–
	0.0106	0.2642 ... 66.043*	0.2642 ... 66.043*	0.2642 ... 42.268*	0.2642 ... 42.268*	0.2642 ... 66.043*	0.2642 ... 66.043*	0.2642 ... 66.043	–
12	0.1	–	–	–	–	–	–	2 ... 600	–
	0.0264	–	–	–	–	–	–	0.5283 ... 158.504	–
16	0.2	–	–	–	–	–	–	3 ... 700	–
	0.0528	–	–	–	–	–	–	0.7925 ... 184.920	–

* maximum pressure 350 bar / 5076 psi

Nominal size	0.025	0.04	0.1	0.2	0.4	1	3	5	12	16
V _g in cm ³	0.025	0.040	0.100	0.245	0.400	1.036	3.000	5.222	12.000	16.000
Resolution in pulse/l* pulse/gal	40,000 151,416	25,000 94,635	10,000 37,854	4,081 15,448	2,500 9,464	965 3,654	333 1,262	191 723	83 314	63 237
Resolution Encoder Typ 512** in pulse/l pulse/gal	–	673,684 2,550,171	–	149,271 565,052	–	35,301 133,629	–	–	–	–

* It is possible to quadruple the resolution by employing both measuring channels.

** More sensor resolutions available on request.

Technical data



I Encoder version resolution

Nominal size	Sensor resolution*	Pulse volume	Resolution	Measured value resolution 4-fold**	Pulse frequency with Q_{max}
	pulse/rev	cm ³ /pulse	pulse/l pulse/gal	pulse/l pulse/gal	Hz
0.04	512	0.001484	673,684 2,550,171	2,694,737 10,200,689	44,912
	2,500	0.000304	3,289,474 12,452,013	13,157,896 49,808,054	219,298
0.2	512	0.006699	149,271 565,052	597,084 2,260,208	39,806
	2,500	0.001372	728,863 2,759,046	2,915,452 11,036,186	194,363
1	512	0.028328	35,301 133,628	141,204 534,515	47,067
	2,500	0.005802	172,366 652,476	689,464 2,609,905	229,822

* More sensor resolutions available on request.

** Resolution with both measuring channels and 4-fold evaluation

I Sealing elements and electronics temperature tolerance

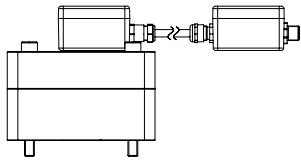Versions with integrated electronics	Remote-electronics versions
Version with appliance socket (Hirschmann) $T_{amb} = -40^* \dots 80 \text{ } ^\circ\text{C} / -40^* \dots 176 \text{ } ^\circ\text{F}$ (IO-LINK ... $50 \text{ } ^\circ\text{C} / 122 \text{ } ^\circ\text{F}$ **)	$T_{amb} = -60^* \dots 150 \text{ } ^\circ\text{C} \quad -40 \dots 80 \text{ } ^\circ\text{C}$ $-76^* \dots 301^* \text{ } ^\circ\text{F} \quad -40 \dots 176^* \text{ } ^\circ\text{F}$
	

Electronics version	Standard	Reduced supply voltage 12 V	High temperature	ATEX version	IO-Link	without pre-amplifier	Encoder***	High-temperature PLUS	ATEX version High-temperature PLUS	Low temperature
Type key ID	S	R	H	X	L	V	E	K	KX	T
Sealing material	Media temperature in $^\circ\text{C}$ $^\circ\text{F}$									
FKM				-15 ... 80 5 ... 176					-	
EPDM	-40 ... 120 -40 ... 248		-40 ... 150 -40 ... 302	-30 ... 80 -22 ... 176	-40 ... 80 -40 ... 176	-40 ... 120 -40 ... 248	-20 ... 80 -4 ... 176		-	
FEP				-30**** ... 80 -22**** ... 176				-40 ... 210 -40 ... 410	-30**** ... 180 -22**** ... 356	-
FFKM	-15 ... 120 5 ... 248		-15 ... 150 5 ... 302	-15 ... 80 5 ... 176		-15 ... 120 5 ... 248	-15 ... 80 5 ... 176	-15 ... 210 5 ... 410	-15 ... 200 5 ... 392	-
FVMQ				-					-	-60 ... 200 -76 ... 392


* For ATEX/IECEX: $T_{amb \text{ min FKM}} = -15 \text{ } ^\circ\text{C} / 5 \text{ } ^\circ\text{F}$
 $T_{amb \text{ min EPDM}} = -30 \text{ } ^\circ\text{C} / -22 \text{ } ^\circ\text{F}$
 $T_{amb \text{ min FEP}} = -30 \text{ } ^\circ\text{C} / -22 \text{ } ^\circ\text{F}$ ****
 $T_{amb \text{ min FFKM}} = -15 \text{ } ^\circ\text{C} / 5 \text{ } ^\circ\text{F}$

** Higher temperatures on request.


*** Only for K1 and G1

**** Devices produced up to and including 2019 can be used at temperatures of up to $-15 \text{ } ^\circ\text{C} / 5 \text{ } ^\circ\text{F}$.

Selection guide

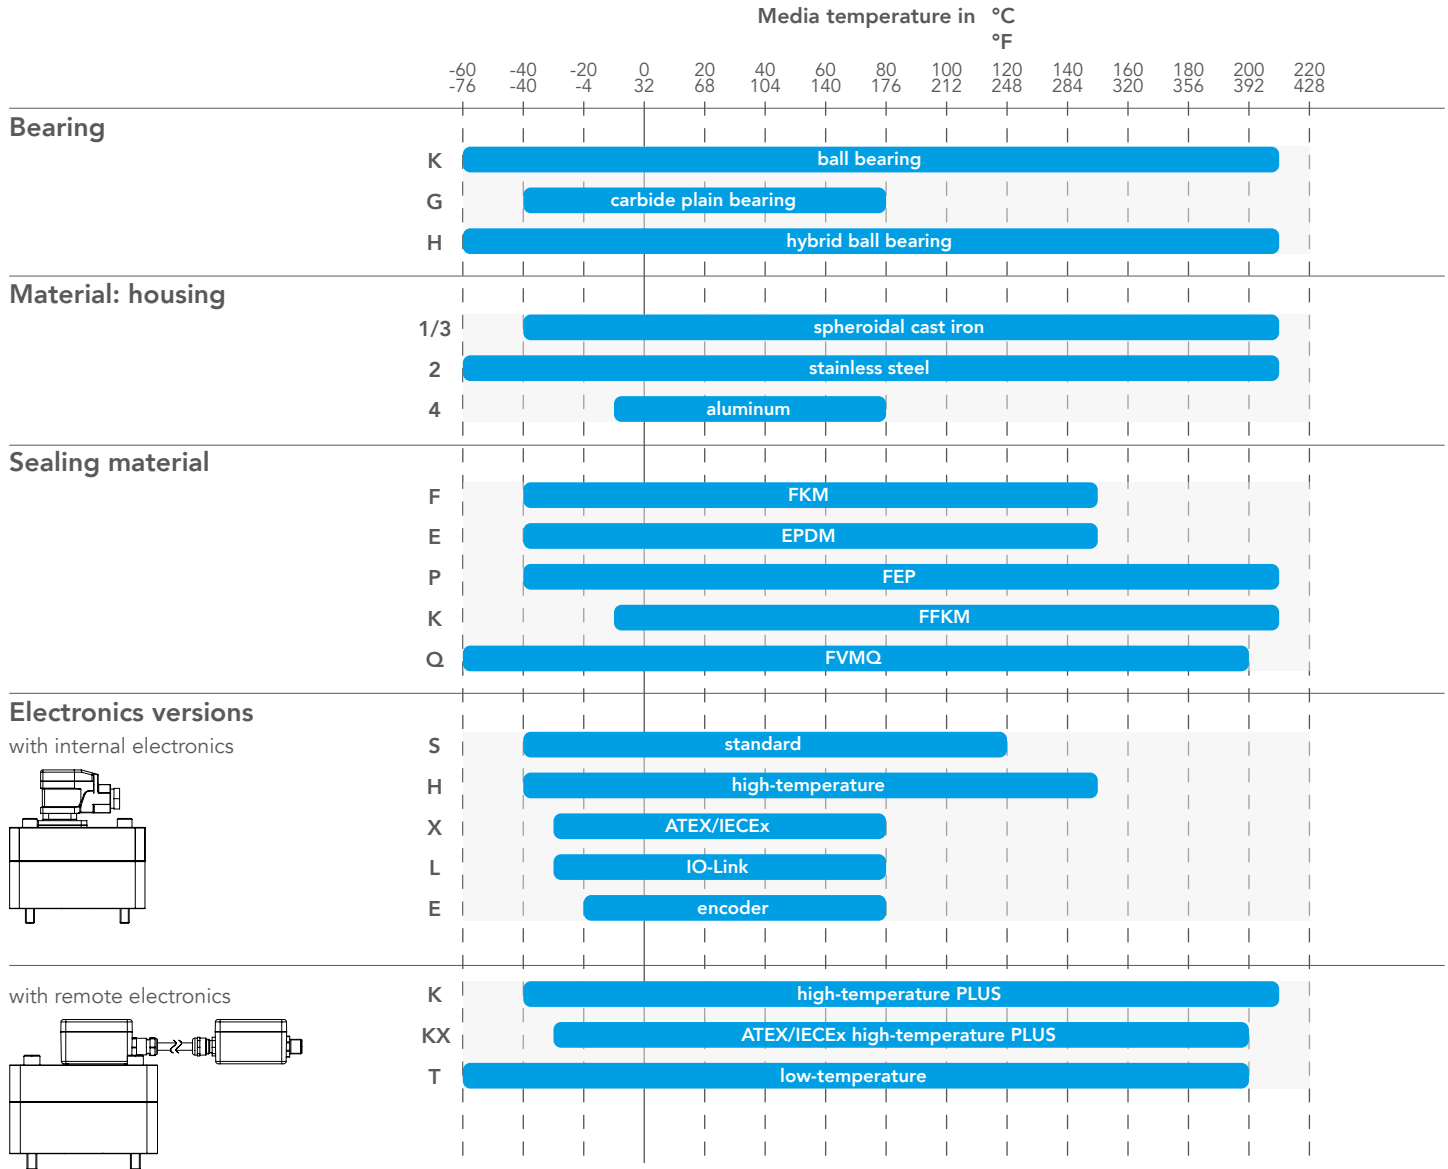

Example: determination of temperature range

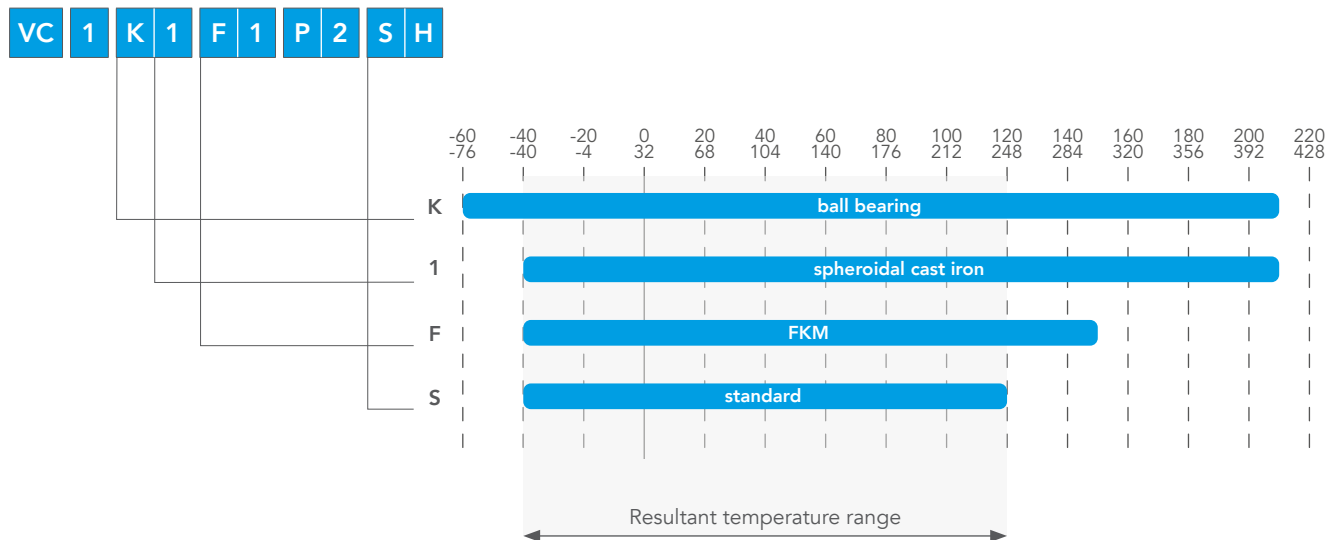

Type key


VC	1	K	1	F	1	P	2	S	H
1	2	3	4	5	6	7	8	9	11

1 Product									
2 Nominal size									
0.025	0.04	0.1	0.2	0.4	1	3	5	12	16
3 Bearing									
K			H			C		G	
ball bearing			hybrid ball bearing			ball bearing, high tolerance		carbide plain bearing	
4 Material									
1			2			3		4	
housing spheroidal cast iron GJS-400 gears steel			housing stainless steel gears stainless steel			housing spheroidal cast iron GJS-600 gears steel		housing aluminum (only nominal size 0.2)	
5 Sealing									
F		E			P		K		Q
FKM		EPDM			FEP		FFKM		FVMQ
6 Surface									
1			2				3		
standard (coated)			Skydrol-resistant coating				without coating		
7 Connection type									
P					R				
plate mounting					pipe connection				
8 Sensors									Note
2	2 sensors								
1	1 sensor								
3	without sensors								
4	2 sensors vibration-proof/condensation-proof								
5	encoder only nominal sizes 0.01 · 0.04 · 0.2 · 1								Pos. 9: only with E
9 Electronic versions (pre-amplifier)		Voltage	Media temperature in °C	Media temperature in °F	Conversion	Note			
S	standard	24 V	-40 ... 120	-40 ... 248	internal				
H	high-temperature	24 V	... 150	... 302	internal				
K	high-temperature PLUS	24 V	... 210	... 410	external				
T	low-temperature	24 V	-60 ...	-76 ...	external				
X	ATEX/IECEX (isolating switching amplifier to be ordered separately)		... 80	... 176	internal	Pos. 11: only with H			
KX	ATEX/IECEX high-temperature PLUS		... 200	... 392	external	Pos. 11: only with V			
R	reduced supply voltage	12 V	... 120	... 248	internal				
L	IO-Link	12 ... 24 V	... 80	... 176	internal				
V	without pre-amplifier		... 120	... 248					
E	encoder	11 ... 30 V	... 80	... 176	internal				
10 Cable length									
		2			5		10		
without cable between flow meter and electronics		with 2 m / 6.56 ft cable			with 5 m / 16.40 ft cable		with 10 m cable / 32.80 ft cable		
11 Electric connection (plug and pre-amplifier case)									
H	appliance socket (Hirschmann)	standard							
M	appliance socket (Hirschmann)	with M12x1 4-pole connection							
K	aluminum connection box	with M12x1 4-pole connection							
C	aluminum connection box	with Cannon plug KPTC							
E	aluminum connection box	with M12x1 4-pole connection, ext. electronics can be disengaged							
V	without								
512	encoder with 512 pulse/rev	with M12x1 4-pole connection							
2500	encoder with 2500 pulse/rev	with M12x1 4-pole connection							

Electronics

I Electric connections


Standard and high-temperature version



1: U _B (brown)
2: Channel 1 (green)
3: Channel 2 (yellow)
4: 0 Volt (white)

High-temperature PLUS and low-temperature version


Connection plug arrangement (M12x1 4-pole round connector)



1: U _B (brown)
2: Channel 1 (white)
3: 0 Volt (blue)
4: Channel 2 (black)

Encoder version


Connection plug arrangement (M12x1 metal/4-pole round connector)



1: U _B
2: channel 1
3: 0 Volt
4: channel 2

Cannon version


Connection plug arrangement



A: U _B (brown)
B: Channel 1 (green)
C: Channel 2 (yellow)
D: 0 Volt (white)

IO-Link version


Connection plug arrangement (M12x1 metal/4-pole round connector)



	IO-Link mode	SIO mode
1: brown	U _B	
2: white	I/Q	Channel 1
3: blue	0 Volt	
4: black	C/Q	channel 2

I Signal characteristics (standard, high-temperature, encoder, IO-Link versions in SIO mode)

The pre-amplifier-generated square-wave signal enables application-specific resolutions. Standard resolution means that the electronics will process one pulse from a channel/sensor per cycle time (rising signal edge in channel I). In contrast, the 4-fold evaluation uses the maximal pulse rate per cycle time, allowing for a resolution that is four times as high as in the standard evaluation. All characteristics of the signal (rising and falling signal edge of both sensors/channels) are exploited in the evaluation.

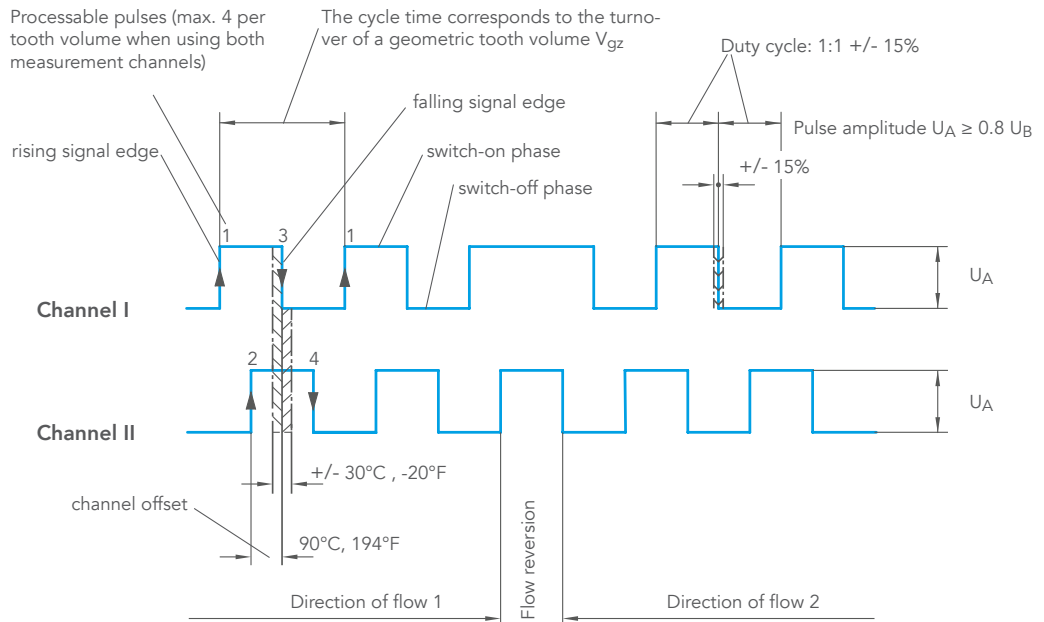

Electronics

I Standard versions electrical characteristics

Number of measuring channels	1 or 2
Working voltage U_B	24 V +/- 20% or 12 V +/- 20% for versions with reduced supply voltage
Pulse amplitude U_A	$\geq 0.8 U_B$
Pulse shape with symmetrical output signal	Square wave, duty factor/channel 1:1 \pm 15%
Signal output	PNP / NPN
Pulse offset between the two channels	$90^\circ \pm 30^\circ$
Power requirement $P_{b\max}$	0.9 W
Output power / channel $P_{a\max}$	0.3 W short circuit-protected
Protection rating	IP 65

I Encoder versions electrical characteristics

Number of measuring channels	2
Working voltage U_B	11 ... 30 V
Pulse amplitude U_A	$Min_{High} \geq U_B - 3 V$ $Max_{Low} \leq 2,5 V$
Pulse shape with symmetrical output signal	Square wave, duty factor/channel 1:1 \pm 15%
Signal output	Push-Pull
Pulse offset between both channels	$90^\circ \pm 30^\circ$
Maximum load	+/- 30 mA
Power consumption	standard 45 mA maximum 150 mA
Protection rating	IP 65

I IO-Link versions electrical characteristics

	IO-Link mode	SIO mode
Number of measuring channels	1 or 2	
Working voltage U_B	12 ... 24 V	
Pulse amplitude U_A	$Min_{High} \geq U_B - 2 V$ $Max_{Low} \leq 2 V$	
Pulse shape with symmetrical output signal	-	Square wave, duty factor/ channel 1:1 \pm 15%
Signal output I_{max}	active push-pull $I_{max} \leq 25 mA$	
Pulse offset between the two channels	-	$90^\circ \pm 30^\circ$
Power requirement $P_{b\max}$	2 W	
Protection rating	IP 65	
Ambient temperature	... 50 °C (Higher temperatures on request)	


Electronics

I IO-Link

Thanks to its international standardisation (IEC 61131-9), the IO-Link technology offers point-to-point connectivity with continuous monitoring between any desired control layer and the VC-IO-Link assembly. Handling and startup is made easy by the associated IODD (IO Device Description) file.

The VC-IO-Link assembly directly delivers all measured values with units. In the preset SIO mode (standard input output), the volume counter gives square-wave signals if the IO-Link mode is not enabled by an IO-Link master. This provides downward compatibility of the VC-IO-Link assembly with the standard square-wave signal (see page 12).

IO-Link connection plug




	IO-Link mode	SIO mode
L1 green	Flashing at 1/s	Continuous light, ready for operation
L2 red	Channel 1 gear detected = LED on gear not detected = LED off	
L3 red	Channel 2 gear detected = LED on gear not detected = LED off	

IO-Link characteristics

Name	VC
Manufacturer ID	0x0524
Device ID	0x000001
Name of manufacturer	Kracht GmbH
IO-Link connection plug	V1.1
Bit rate	COM3 / 230.4 kbit/s
Minimum cycle time	500µs
SIO mode supported	Yes
Indexed service data unit used (IS DU)	Yes
Data storage (DS) possible	Yes


I Communication of the IO-Link assembly

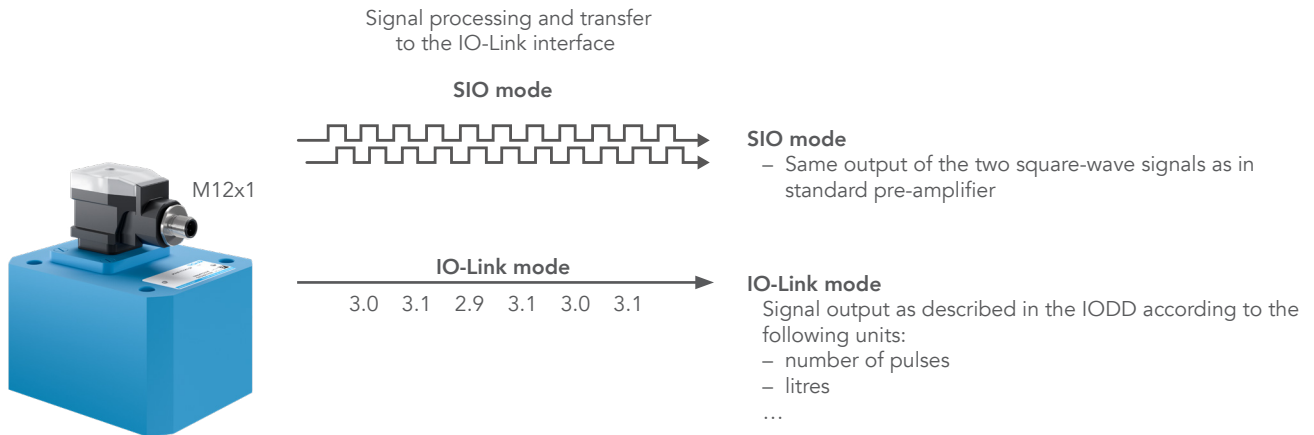

Explosion-proof version (ATEX/IECEX)

I Function

- All gear type flow meters are available as explosion-proof versions according to ATEX and IECEx certification.
- The explosion-proof version consists of the gear type flow meter (intrinsically safe electric gear) and the switching amplifier K 130 (accessory electric gear). This layout meets the ignition protection type "intrinsic safety".
- The gear type flow meter is installed in the explosive atmosphere.
- The switching amplifier K 130 is assembled in the safe atmosphere.
- The gear type flow meter is electrically connected with the switching amplifier. The switching amplifier analyses the sensor signals coming from the gear type flow meter and converts them into square-wave signals.
- It is prohibited to deploy the gear type flow meter in explosive atmospheres without switching amplifier.
- The cable between the gear type flow meter and switching amplifier may be up to 400 / 1312 ft long.
- The switching amplifier features LEDs to monitor for line breakage / short circuit, channel switching state, and voltage supply.

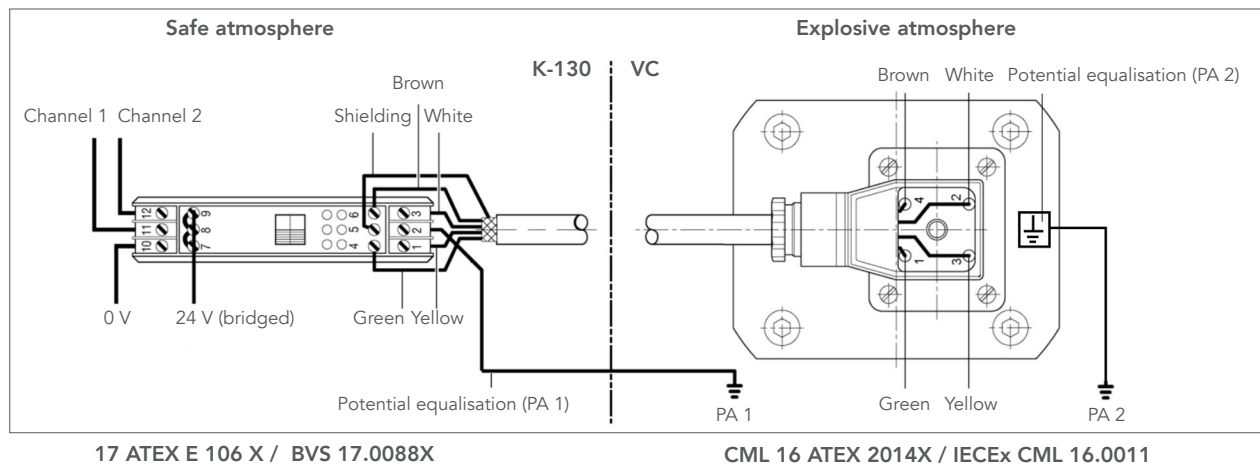

Notes

This drawing only serves as an example for the connection of the sensors to the isolating switching amplifier K 130. Observe the applicable standards when assembling a plant in an explosive atmosphere.

Ignition protection marking (device-dependent)

Ⓢ II 2G Ex ia IIC T4 Gb

Ⓢ II 2D Ex ia IIIC T135 °C / 275 °F Db


I Switching amplifier K-130 technical characteristics

Supply	
Supply voltage terminal 7 (L+), terminal 10 (L-)	DC 24 Volt +/- 20%
Output (not intrinsically safe / nominal data of terminals 9, 12, 8, 11)	
Electronic outputs	electrically isolated via photocoupler
Signal level 1-signal	Output voltage > 15 V
Signal level 0-signal	Output voltage ≤ 5 V
Ambient conditions	
low threshold temperature	248 K (- 25 °C / -13 °F)
high threshold temperature	333 K (60 °C / 140 °F)
Mechanics	
Dimensions	114.5 x 99 x 22 mm / 4.51 x 3.90 x 0.87 inch
Mounting	can be snapped on to 35mm / 1.38 inch sectional rail, DIN EN 60715


Pressure drop

I Ball-bearing versions Parameter: Viscosity in cSt


VC 0.025

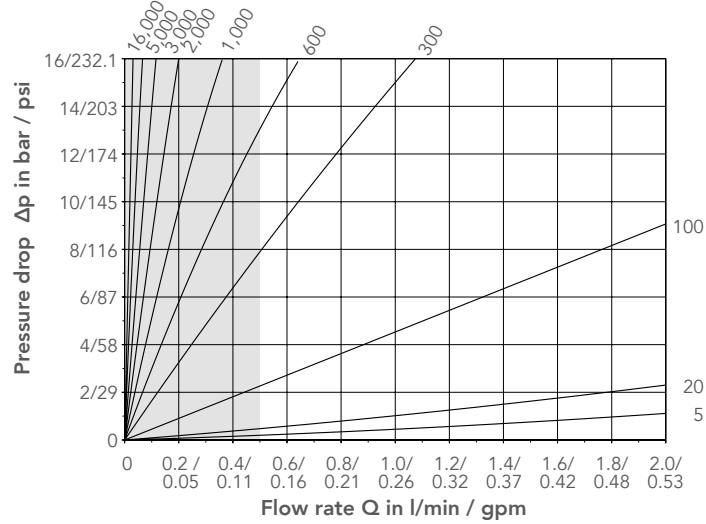


VC 0.025 (section)

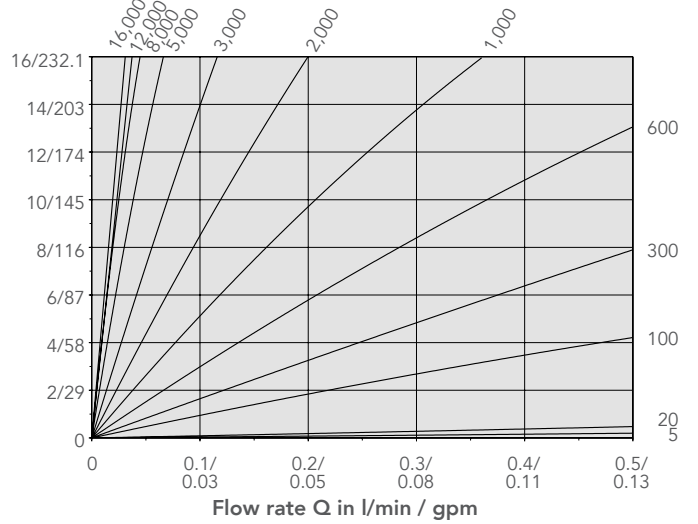


VC 0.04

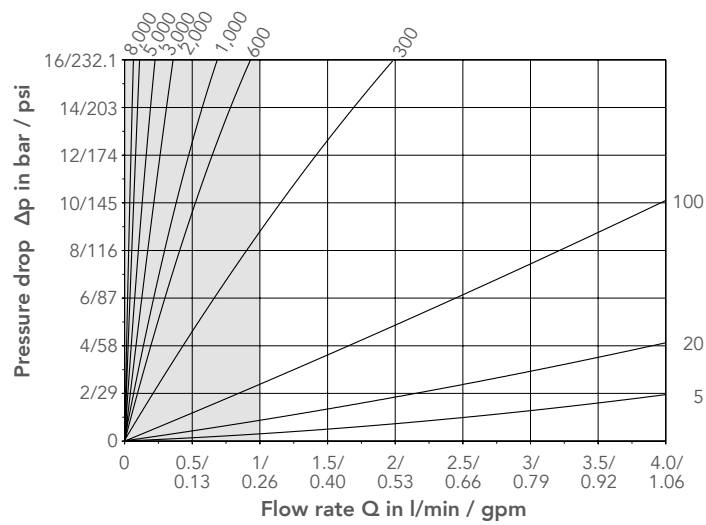


VC 0.04 (section)

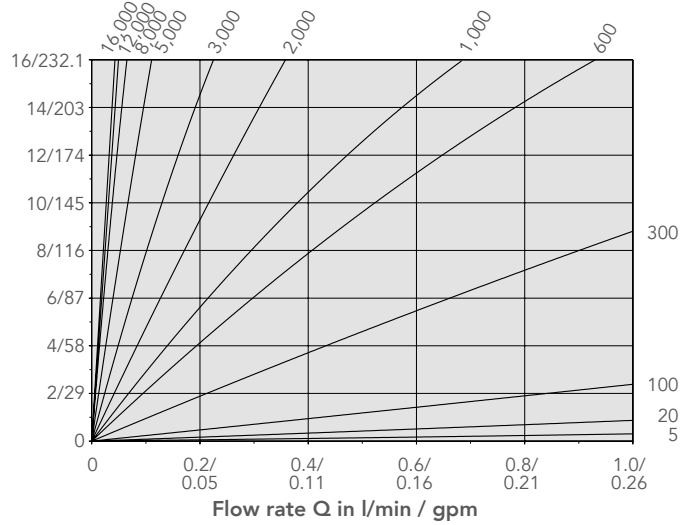

VC 0.1

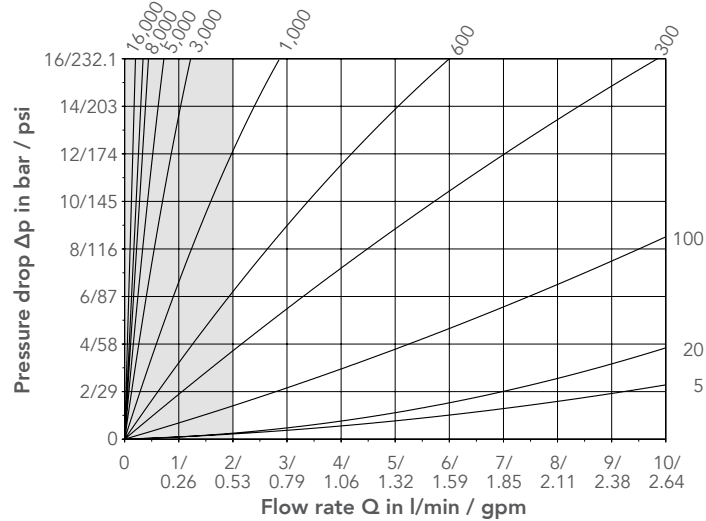


VC 0.1 (section)

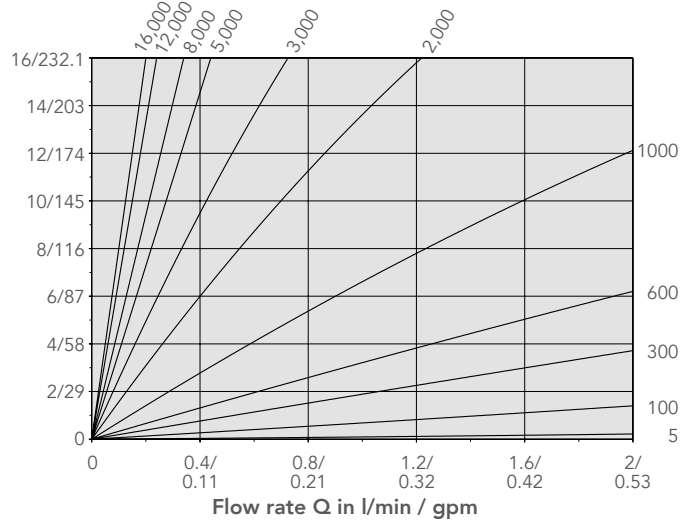


Pressure drop

I Ball-bearing versions Parameter: Viscosity in cSt


VC 0.2

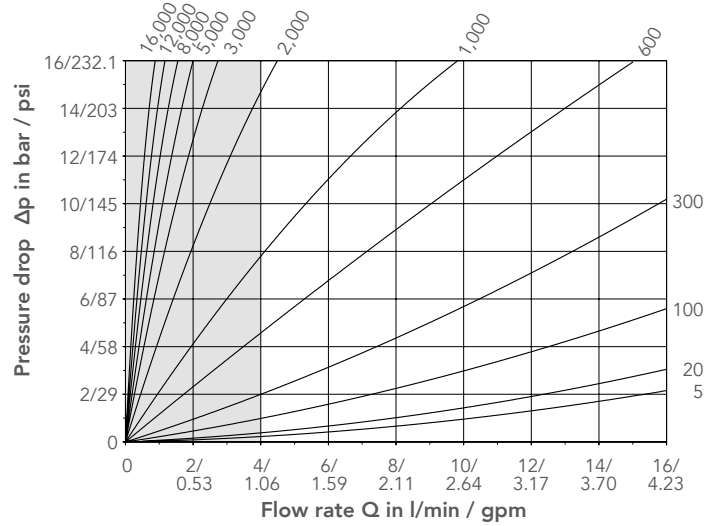


VC 0.2 (section)

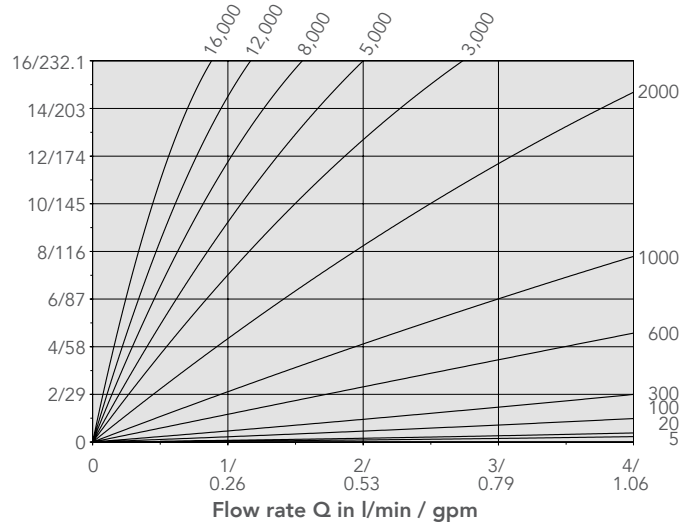


VC 0.4

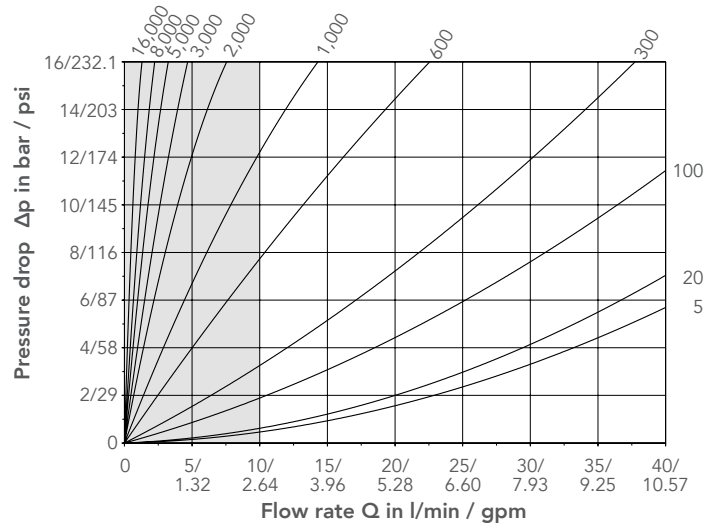


VC 0.4 (section)

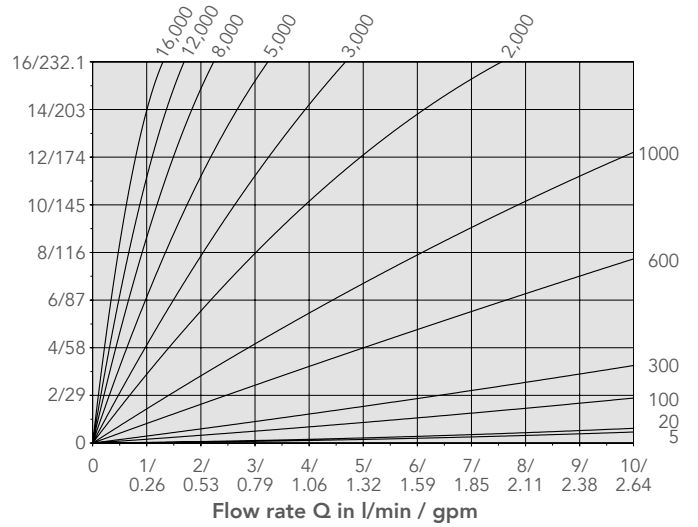

VC 1

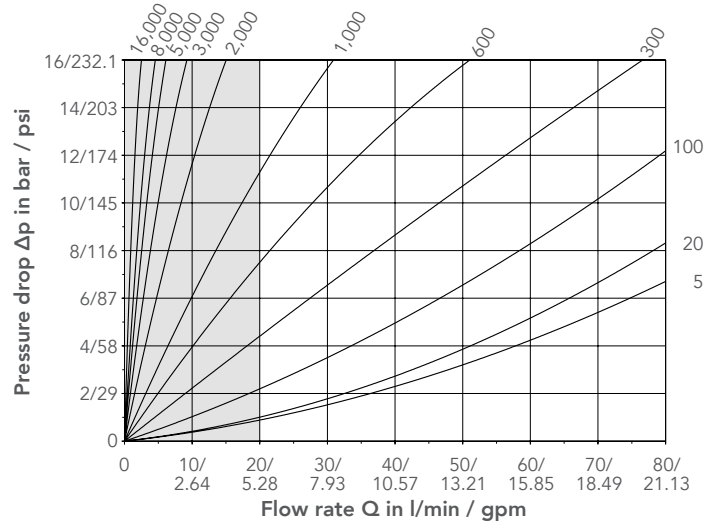


VC 1 (section)

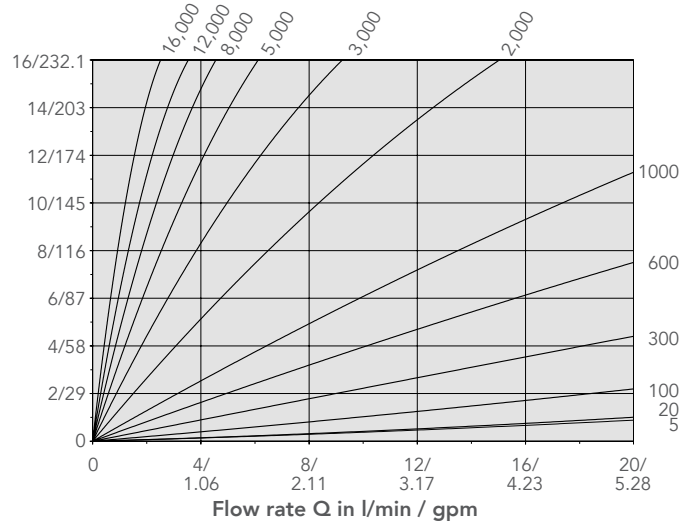


Pressure drop

I Ball-bearing versions Parameter: Viscosity in cSt


VC 3

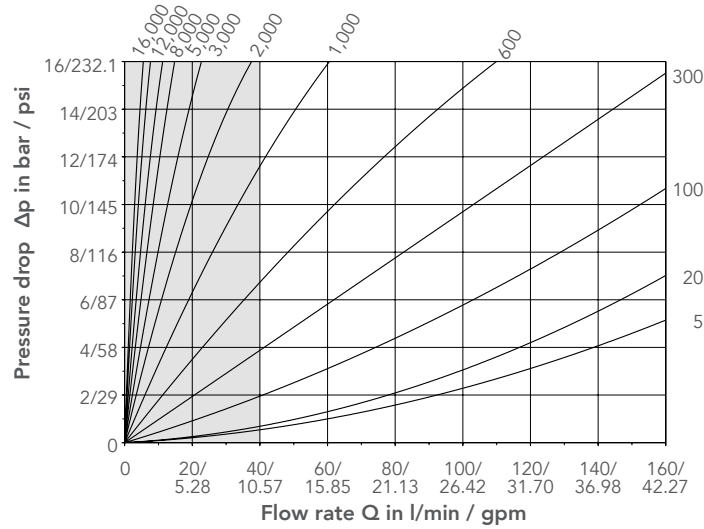


VC 3 (section)

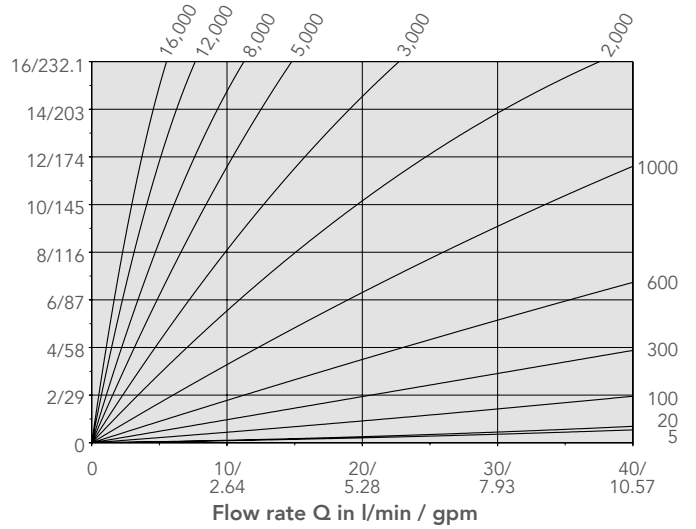


VC 5

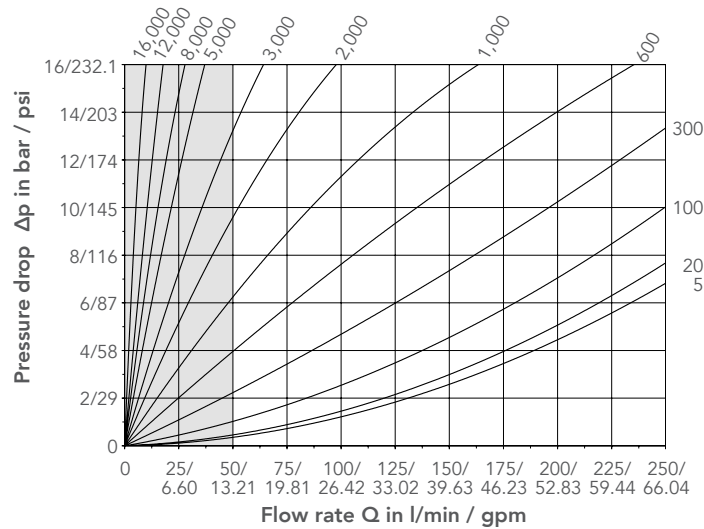


VC 5 (section)

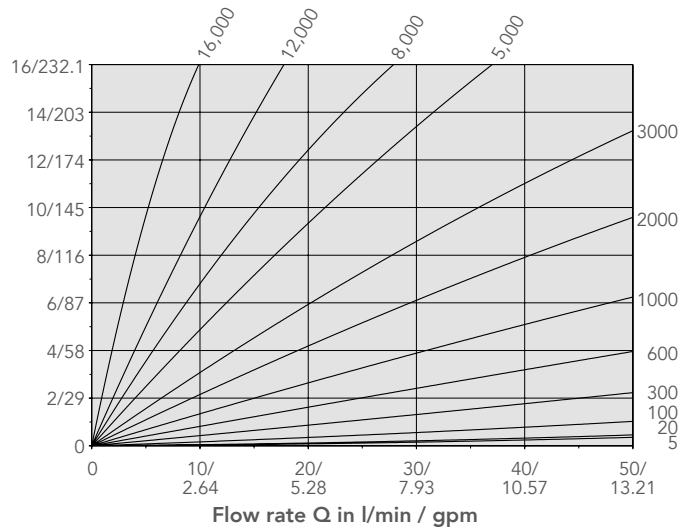

VC 12

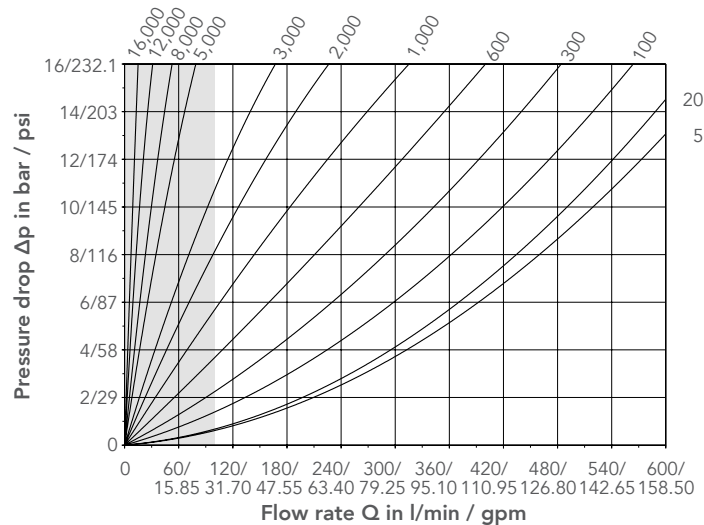


VC 12 (section)

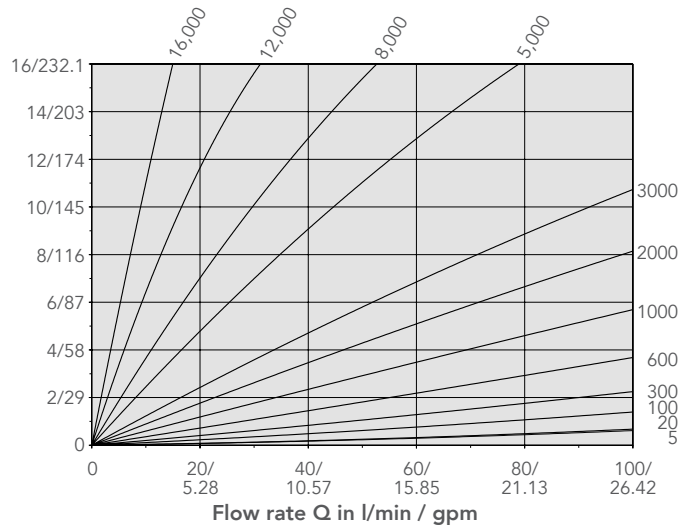


Pressure drop

I Ball-bearing versions Parameter: Viscosity in cSt

VC 16

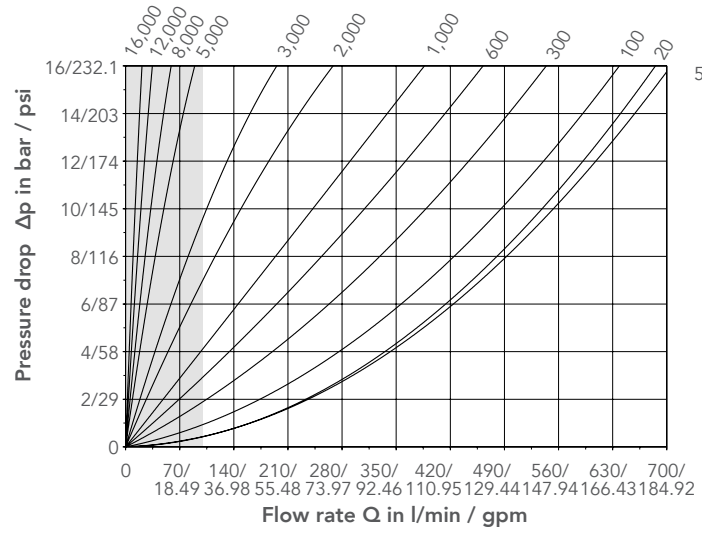


VC 16 (section)

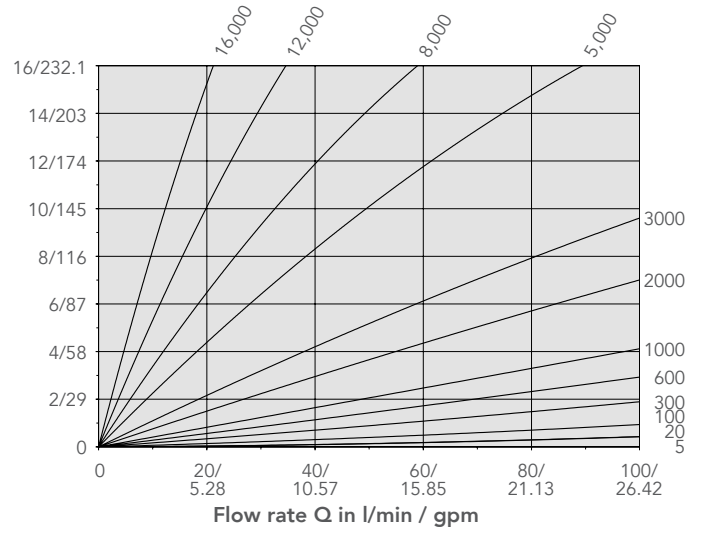


Pressure drop

I Plain-bearing versions Parameter: Viscosity in cSt


VC 0.025

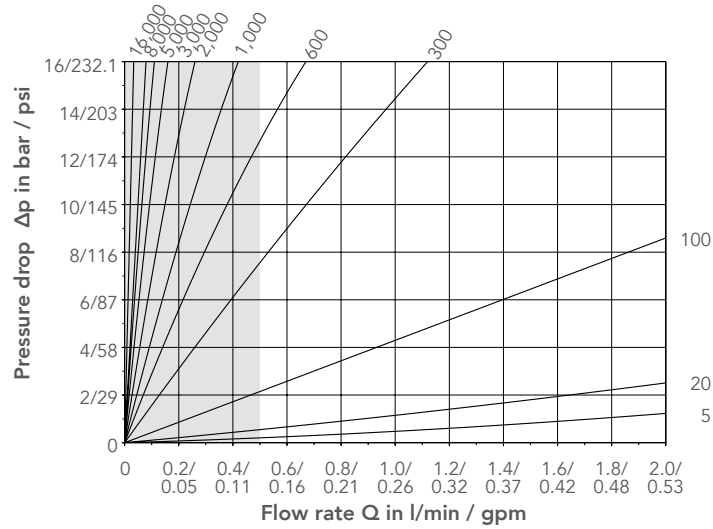


VC 0.025 (section)

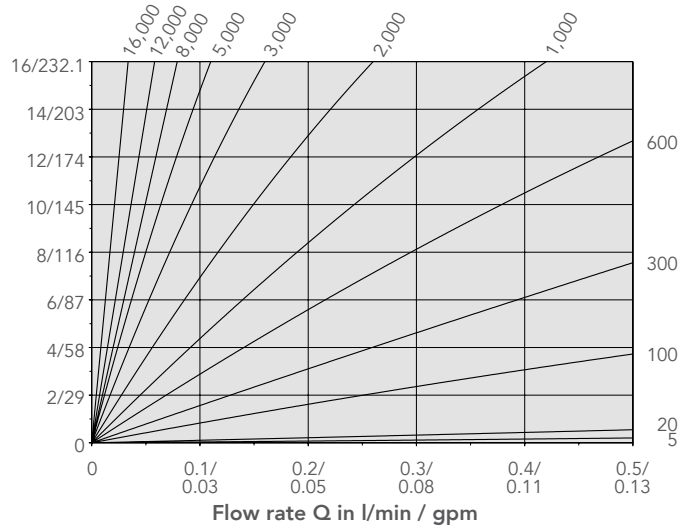


VC 0.1

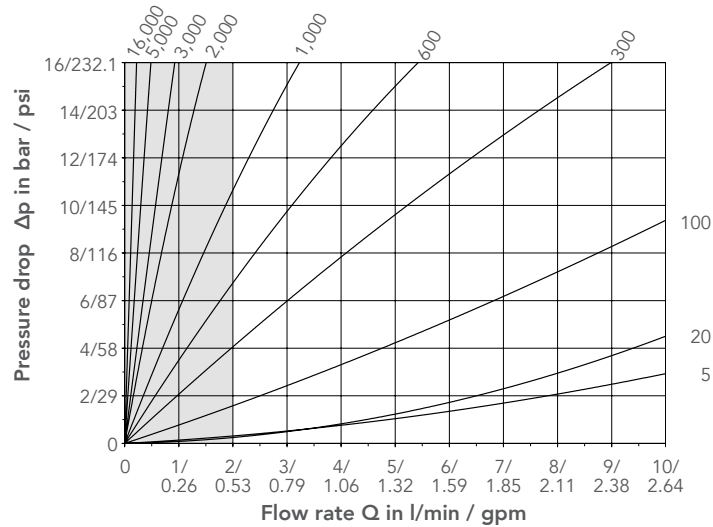


VC 0.1 (section)

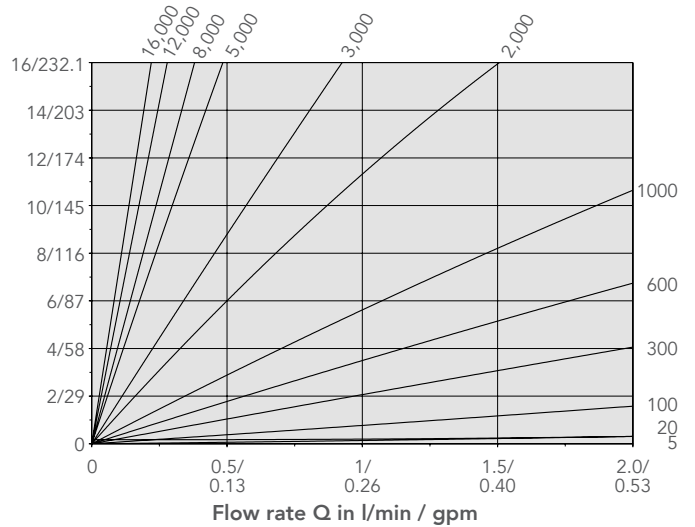

VC 0.2

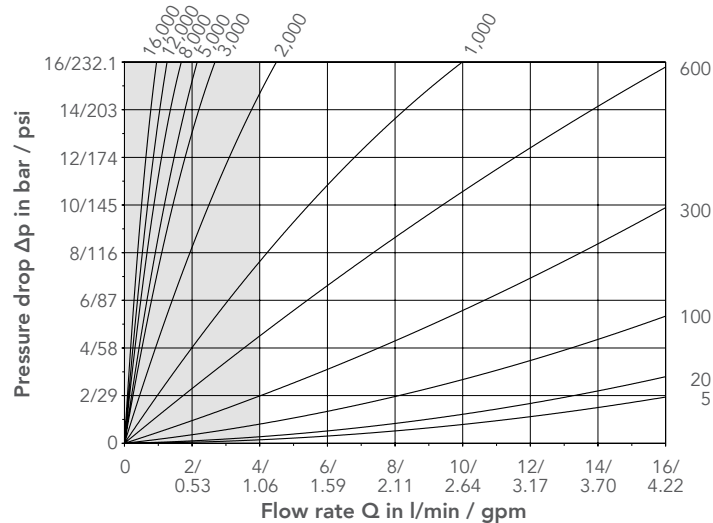


VC 0.2 (section)

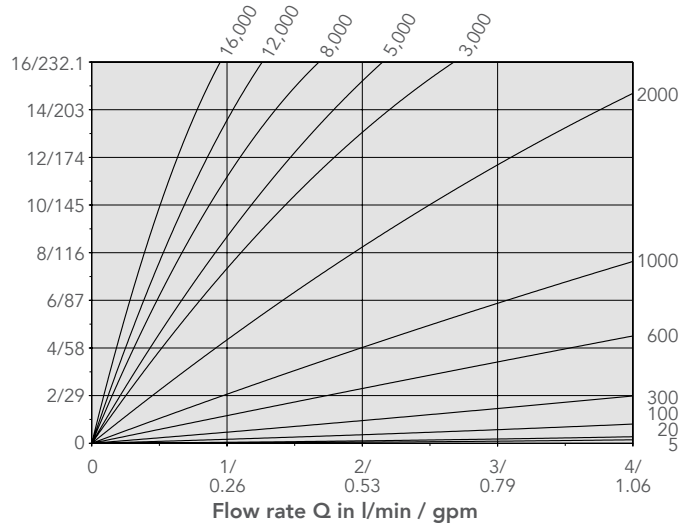


Pressure drop

I Plain-bearing versions Parameter: Viscosity in cSt


VC 0.4

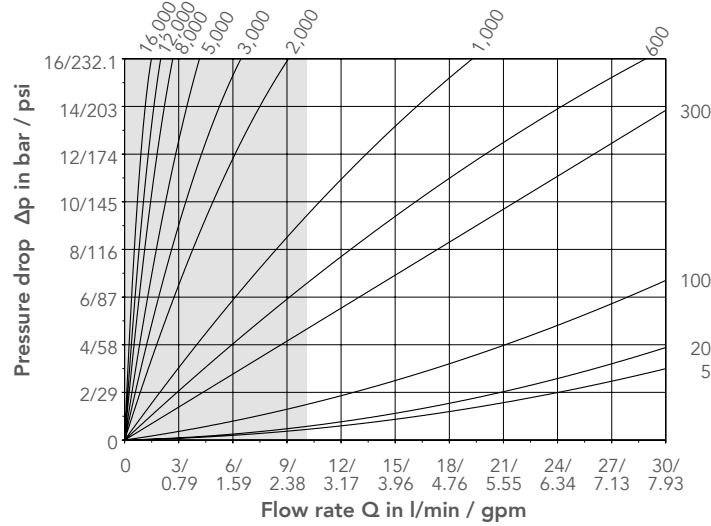


VC 0.4 (section)

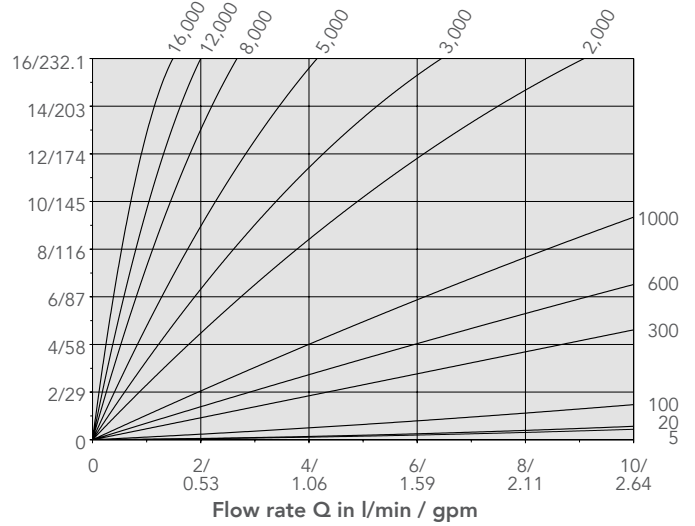


VC 1

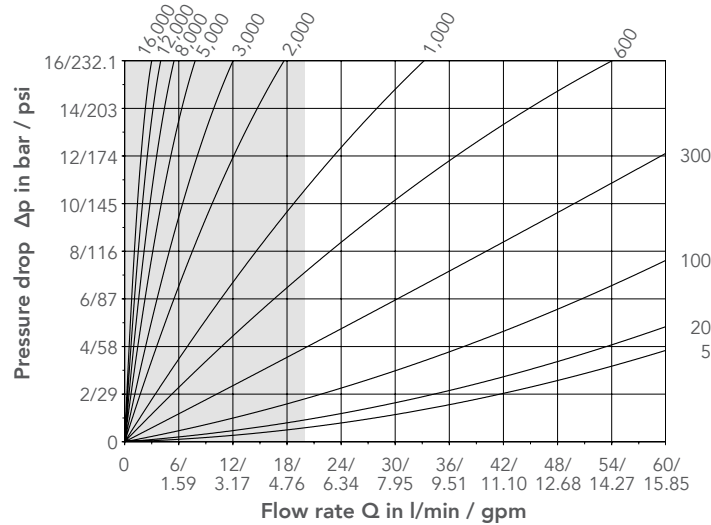


VC 1 (section)

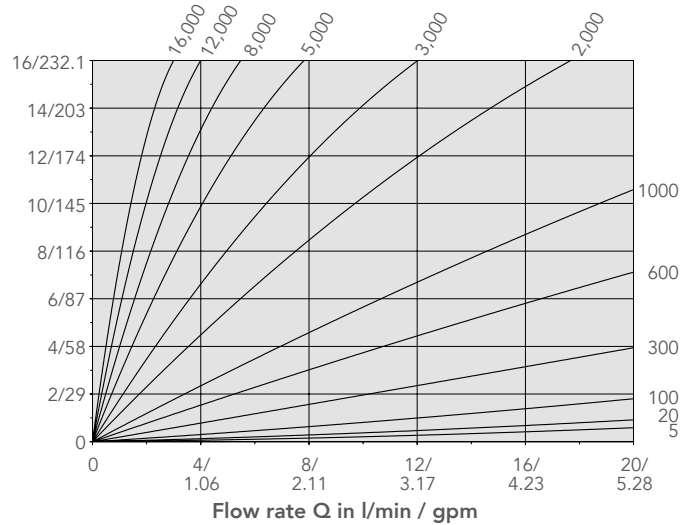

VC 3

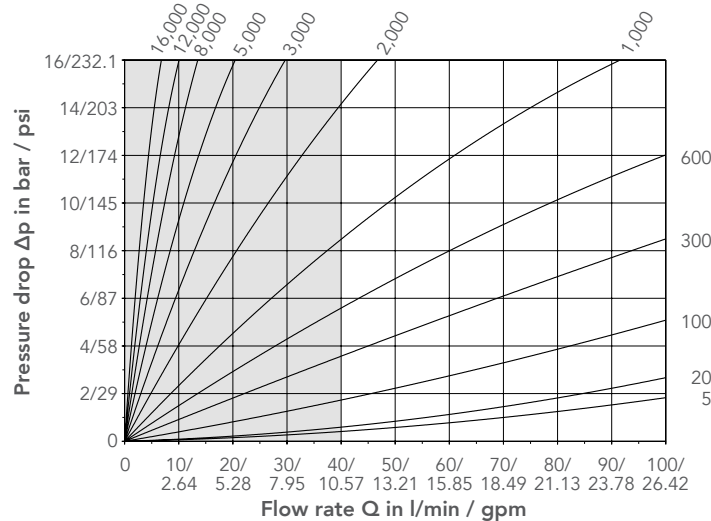


VC 3 (section)

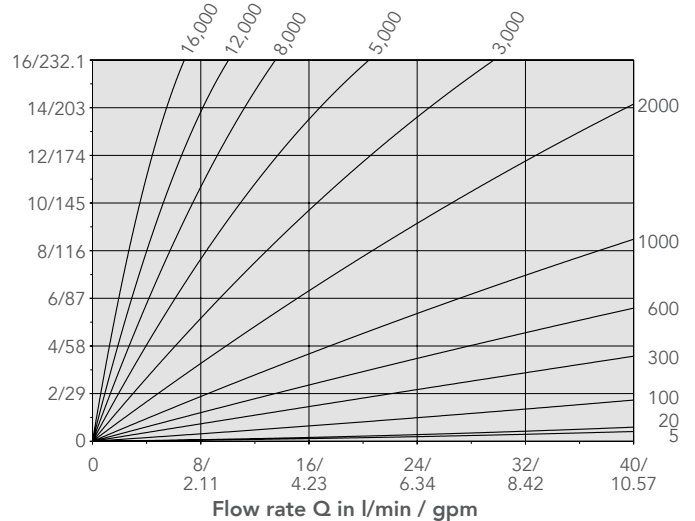


Pressure drop

I Plain-bearing versions Parameter: Viscosity in cSt

VC 5

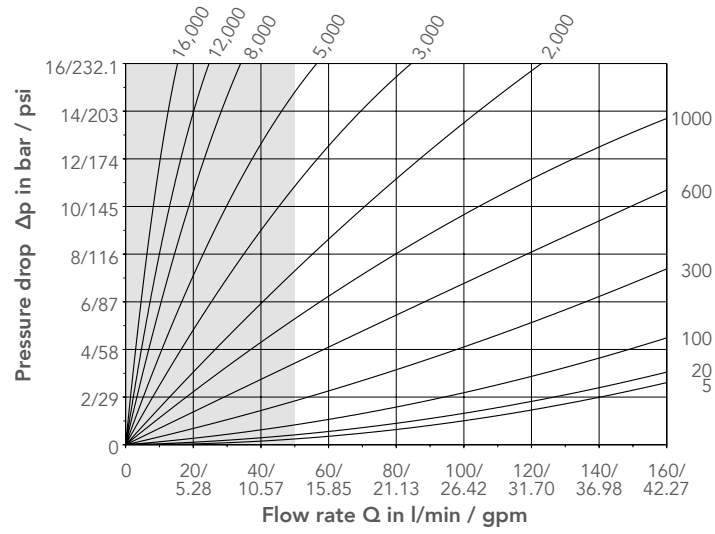

VC 5 (section)

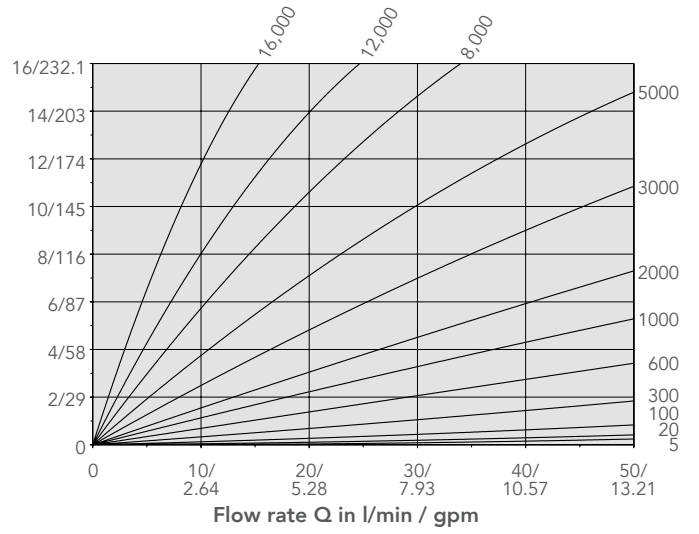

VC technical drawings overview

Versions	Nominal sizes	Electronics versions	Restriction	Page
Spheroidal cast iron version Plate mounting	0.025 ... 5	> standard > high-temperature > ATEX/IECEX > IO-Link > encoder		24
Spheroidal cast iron version Plate mounting	0.025 ... 5	> high-temperature Plus > high-temperature Plus ATEX/IECEX		25
Spheroidal cast iron version Plate mounting	3 and 5	> standard > high-temperature > ATEX/IECEX > IO-Link	only K3	26
Spheroidal cast iron version Plate mounting	3 and 5	> high-temperature Plus > high-temperature Plus ATEX/IECEX	only K3	27
Spheroidal cast iron version Plate mounting	12 and 16	> standard > high-temperature > ATEX/IECEX > IO-Link > encoder		28
Spheroidal cast iron version Plate mounting	12 and 16	> high-temperature Plus > high-temperature Plus ATEX/IECEX		29
Stainless-steel version Plate mounting	0.025 ... 5	> standard > high-temperature > ATEX/IECEX > IO-Link > encoder		30
Stainless-steel version Plate mounting	0.025 ... 5	> high-temperature Plus > high-temperature Plus ATEX/IECEX > low-temperature		31
Stainless-steel version Pipe connection	0.025 ... 5	> standard > high-temperature > ATEX/IECEX > IO-Link > encoder		32

Dimensions

I Spheroidal cast iron version – plate mounting

Electronics versions: standard / high-temperature / ATEX/IECEX / IO-Link / encoder


Nominal size	Dimensions											Tightening torque	Weight
	A	C	D	F	G*	J	K	L	M	N	P	Nm	kg/lbs
												M _A	m
VC 0.025	85/3.35	10/0.39	60/2.36	50/1.97	101/3.98	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	1.8/3.97
VC 0.04	85/3.35	9/0.35	60/2.36	56/2.20	107/4.21	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	2.0/4.41
VC 0.04 / encoder	85/ 3.35	12/0.47	60/2.36	48/1.89	95/3.74	9.65/0.38	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	2.0/4.41
VC 0.1	85/ 3.35	10/0.39	60/2.36	55/2.17	106/4.17	-	70/2.76	40/1.57	20/0.79	9/0.35	M 6	14	2.5/5.51
VC 0.2	85/ 3.35	13/0.51	60/2.36	57/2.24	108/4.25	-	70/2.76	40/1.57	20/0.79	9/0.35	M 6	14	2.0/4.41
VC 0.2 / encoder	85/ 3.35	13/0.51	60/2.36	57/2.24	104/4.09	10.80/0.43	70/2.76	40/1.57	20/0.79	9/0.35	M 6	14	2.0/4.41
VC 0.4	100/ 3.94	17/0.67	90/3.54	63/2.48	114/4.49	-	80/3.15	38/1.50	34/1.34	16/0.63	M 8	35	3.7/8.16
VC 1	120/ 4.72	13/0.51	95/3.74	72/2.83	123/4.84	15.50/0.61	84/3.31	72/2.83	35/1.38	16/0.63	M 8	35	5.2/11.46
VC 1 / encoder	120/ 4.72	16/0.63	95/3.74	69/2.72	116/4.57	18.20/0.72	84/3.31	72/2.83	35/1.38	16/0.63	M 8	35	5.4/11.91
VC 3**	170/ 6.69	18/0.71	120/4.72	89/3.51	140/5.51	46.50/1.83	46/1.81	95/3.74	50/1.97	25/0.98	M 12	120	9.0/19.84
VC 5**	170/ 6.69	22/0.87	120/4.72	105/4.13	156/6.14	46.50/1.83	46/1.81	95/3.74	50/1.97	25/0.98	M 12	120	13.0/28.66

* electronics version H: plus 12 mm / 0.47 inch


electronics version X: plus 6 mm / 0.24 inch

** does not apply to K3 specification. Dimensions VC 3/VC 5 – see page 27 for K3.

Version with Hirschmann plug

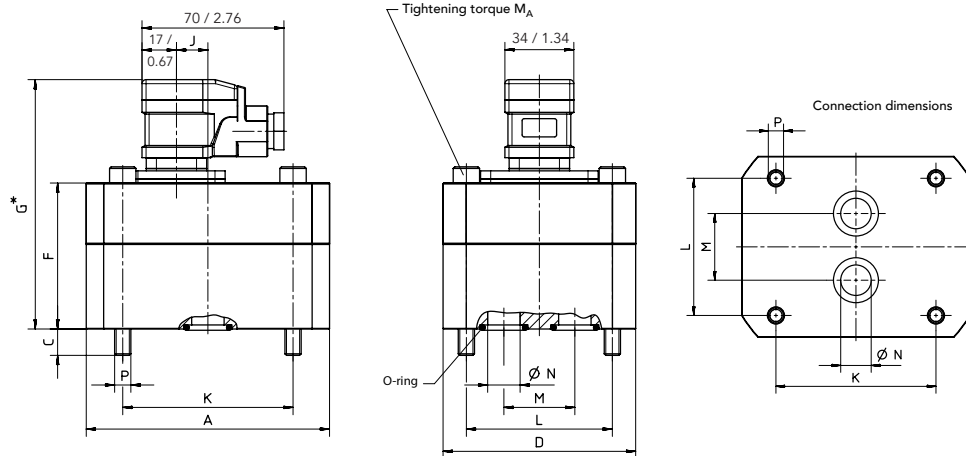

Version with encoder

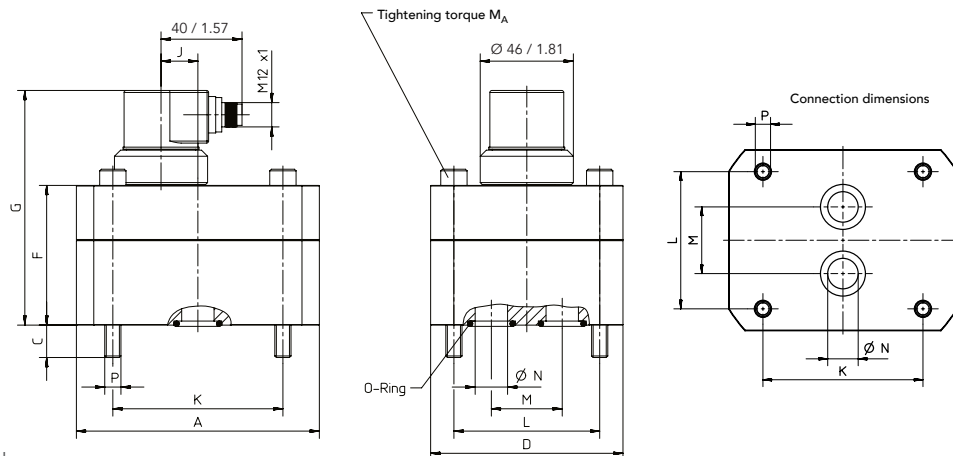

Dimensions in mm / inch


Dimensions

I Spheroidal cast iron version – plate mounting


Electronics versions: high-temperature PLUS / high-temperature Plus ATEX/IECEX

Nominal size	Dimensions											Tightening torque	Weight
	A	C	D	F	G	J	K	L	M	N	P	Nm	kg/lbs
												M_A	m
VC 0.025	85/3.35	10/0.39	60/2.36	50/1.97	87/3.43	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	1.8/3.97
VC 0.04	85/3.35	9/0.35	60/2.36	56/2.20	93/3.66	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	2.0/4.41
VC 0.1	85/3.35	10/0.39	60/2.36	55/2.17	92/3.62	-	70/2.76	40/1.57	20/0.79	9/0.35	M 6	14	2.3/5.07
VC 0.2	85/3.35	13/0.51	60/2.36	57/2.24	94/3.70	-	70/2.76	40/1.57	20/0.79	9/0.35	M 6	14	2.0/4.41
VC 0.4	100/3.94	17/0.67	90/3.54	63/2.48	100/3.94	-	80/3.15	38/1.50	34/1.34	16/0.63	M 8	35	3.7/8.16
VC 1	120/4.72	13/0.51	95/3.74	72/2.83	109/4.29	18.5/0.73	84/3.31	72/2.83	35/1.38	16/0.63	M 8	35	5.2/11.46
VC 3	170/6.69	18/0.71	120/4.72	89/3.50	126/4.96	11/0.43	46/1.18	95/3.74	50/1.97	25/0.98	M 12	120	9.0/19.84
VC 5	170/6.69	22/0.87	120/4.72	105/4.13	142/5.60	11/0.43	46/1.18	95/3.74	50/1.97	25/0.98	M 12	120	13.0/28.66

Connection dimensions

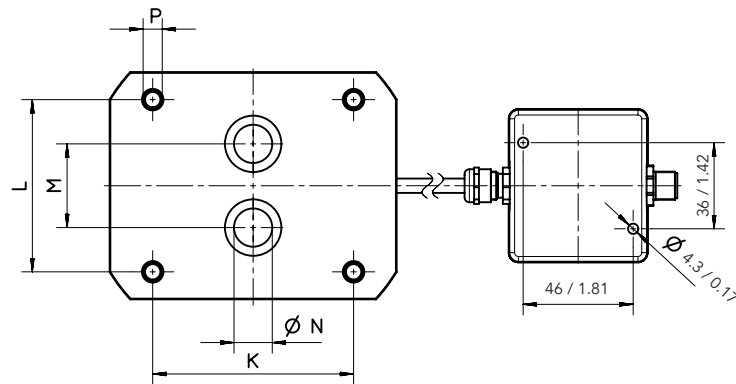

Length as per customer requirement

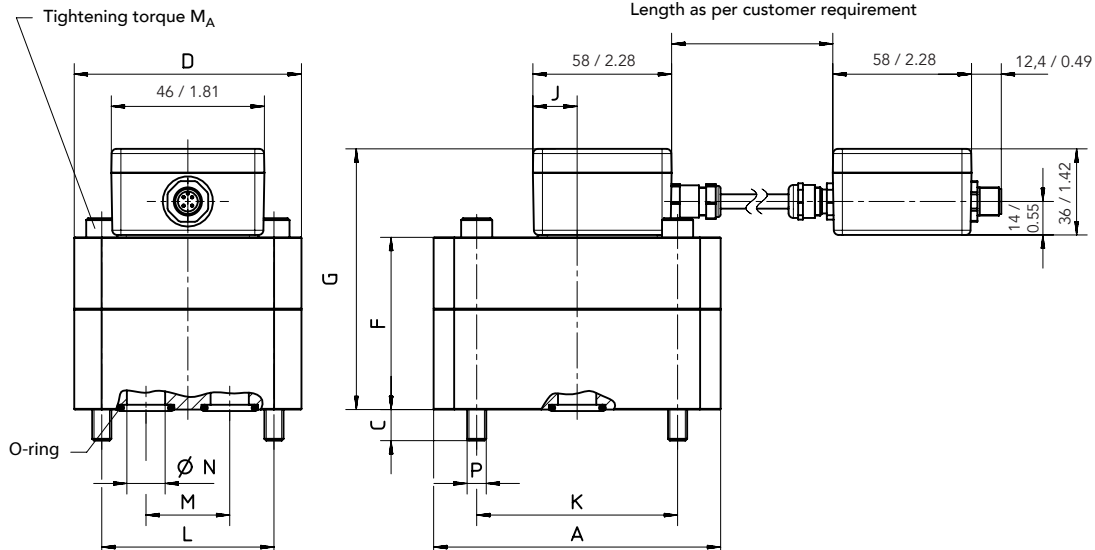

Dimensions




I Spheroidal cast iron version – plate mounting – specification K3

Electronics versions: standard / high-temperature / ATEX/IECEX / IO-Link

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G*	J	K	L	M	N	P	Nm	kg/lbs
											M_A	m
VC 3	23/0.91	179/7.05	99/3.90	150/5.91	46.5/1.83	46/1.81	95/3.74	50/1.97	25/0.98	M 12	145	16.3/35.94
VC 5	22/0.87	179/7.05	115/4.53	166/6.54	46.5/1.83	46/1.81	95/3.74	50/1.97	25/0.98	M 12	145	18.9/41.67

* electronics version H: plus 12 mm / 0.47 inch

Connection dimensions

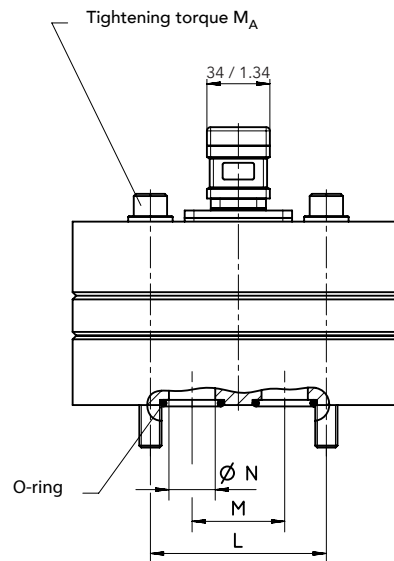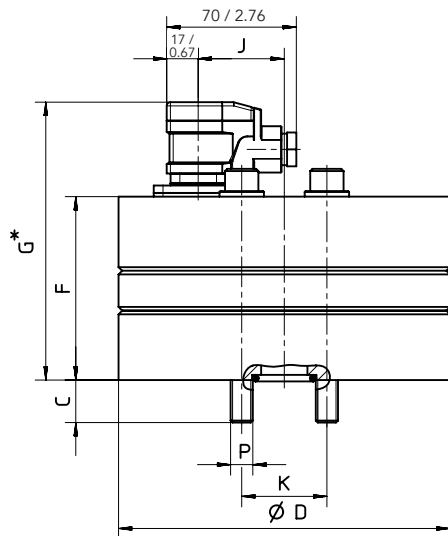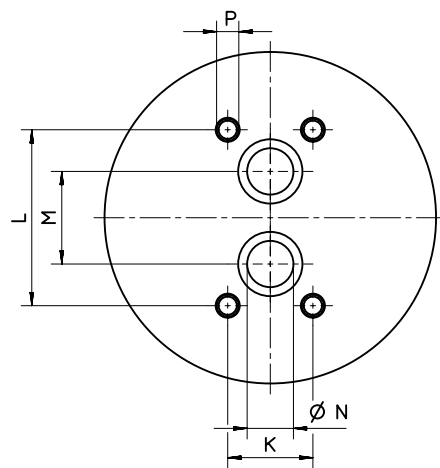



Dimensions

I Spheroidal cast iron version – plate mounting – specification K3

Electronics versions: high-temperature Plus / high-temperature Plus ATEX/IECEX

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G	J	K	L	M	N	P	Nm	kg/lbs
											M_A	m
VC 3	23/0.91	179/7.05	99/3.90	136/5.35	-	46/1.18	95/3.74	50/1.97	25/0.98	M 12	120	16.3/35.94
VC 5	22/0.87	179/7.05	115/4.53	152/5.98	11/0.43	46/1.18	95/3.74	50/1.97	25/0.98	M 12	120	18.9/41.67

Connection dimensions

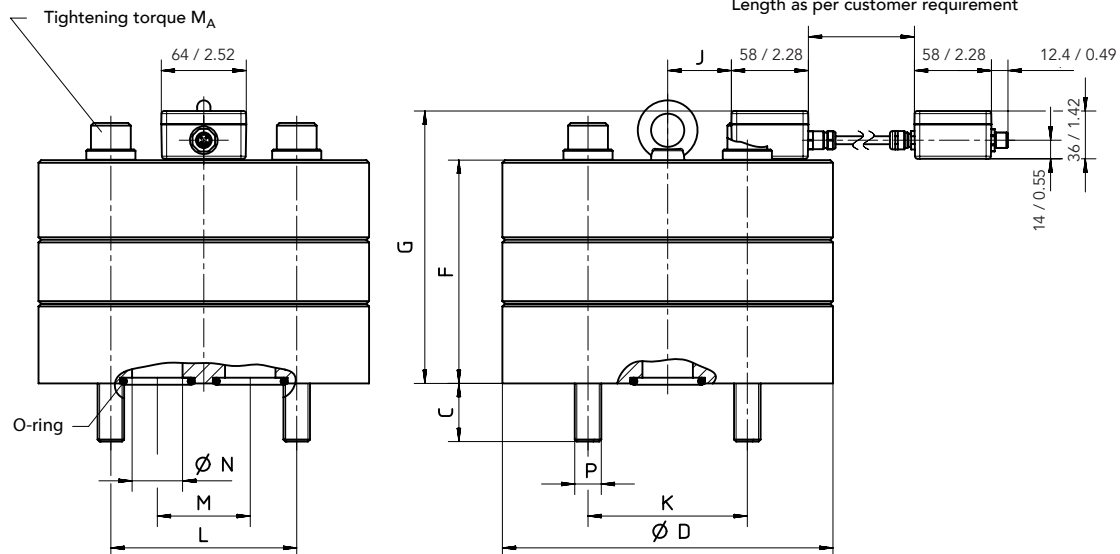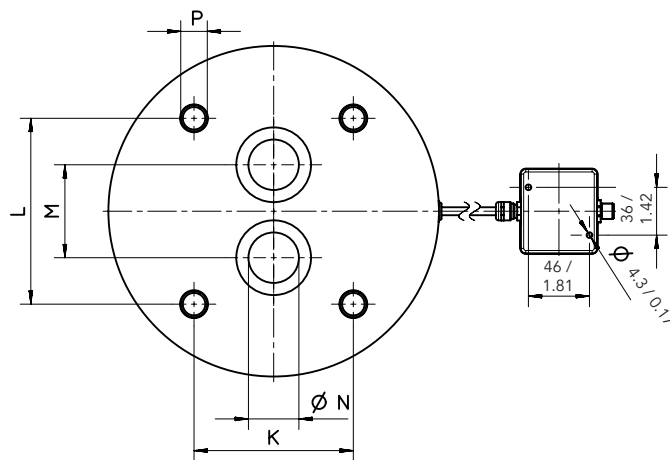

Dimensions




I Spheroidal cast iron version – plate mounting

Electronics versions: standard / high-temperature / ATEX/IECEX / IO-Link / encoder

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G*	J	K	L	M	N	P	Nm	kg
											M_A	m
VC 12	44/1.73	249/9.80	168/6.61	219/8.62	78/3.07	120/4.72	140/5.51	70/2.76	38/1.50	M 20	400	53.5/117.95
VC 16	38/1.50	249/9.80	184/7.24	235/9.25	78/3.07	120/4.72	140/5.51	70/2.76	38/1.50	M 20	400	57.4/126.55

* electronics version H: plus 12 mm / 0.47 inch
electronics version X: plus 6 mm / 0.24 inch

Connection dimensions

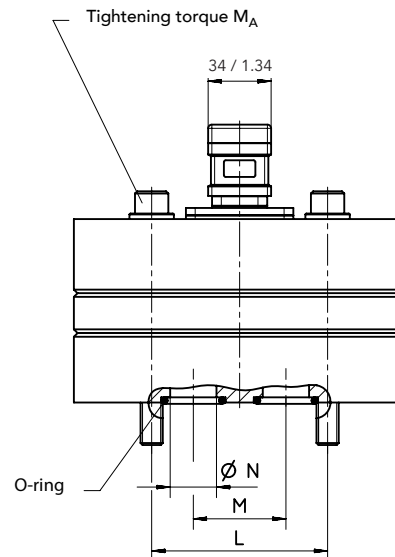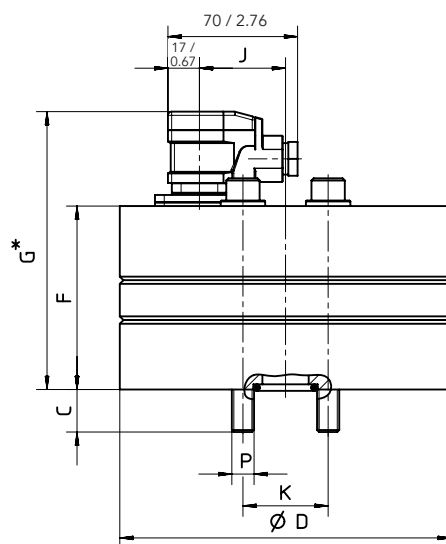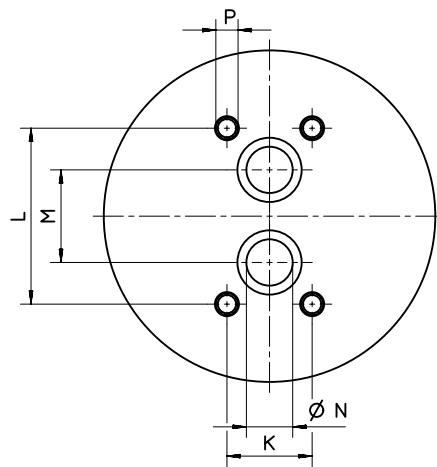



Dimensions

I Spheroidal cast iron version – plate mounting – specification K3

Electronics versions: high-temperature Plus / high-temperature Plus ATEX/IECEx

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G	J	K	L	M	N	P	Nm	kg/lbs
											M_A	m
VC 12	44/1.73	249/9.80	168/6.61	205/8.07	48/1.89	120/4.72	140/5.51	70/2.76	38/1.50	M 20	400	53.5/117.95
VC 16	38/1.50	249/9.80	184/7.24	221/8.70	48/1.89	120/4.72	140/5.51	70/2.76	38/1.50	M 20	400	57.4/126.50

Connection dimensions

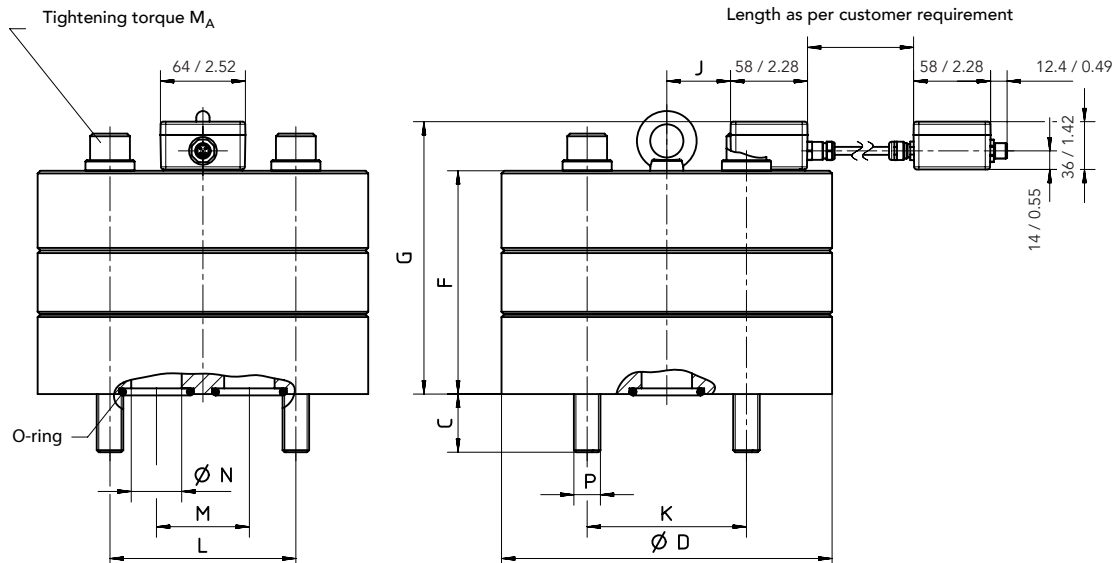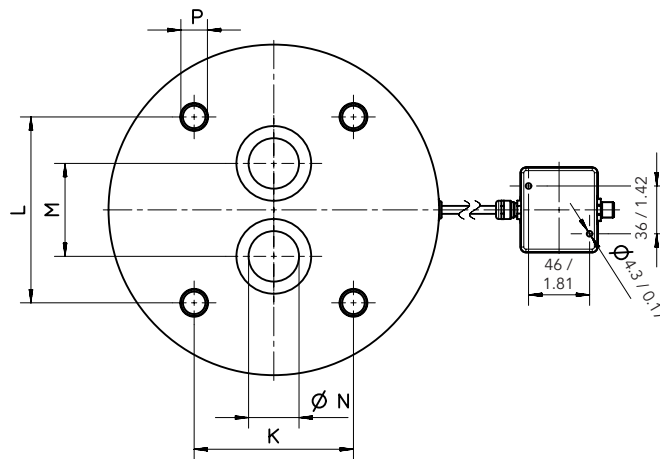


Dimensions

I Stainless steel version – plate mounting

Electronics versions: standard / high-temperature / ATEX/IECEX / IO-Link

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G*	J	K	L	M	N	P	Nm	kg/lbs
											M _A	m
VC 0.025	10/0.39	94/3.70	55/2.17	106/4.17	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	3.0/6.61
VC 0.04	9/0.35	94/3.70	56/2.20	107/4.21	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	3.0/6.61
VC 0.1	10/0.39	94/3.70	55/2.17	106/4.17	-	70/2.76	40/1.57	20/0.79	9.0/0.35	M 6	14	3.0/6.61
VC 0.2	13/0.51	94/3.70	57/2.24	108/4.25	-	70/2.76	40/1.57	20/0.79	9.0/0.35	M 6	14	3.1/6.83
VC 0.4	17/0.67	118/4.65	63/2.48	114/4.49	-	80/3.15	38/1.50	34/1.34	16.0/0.63	M 8	35	4.8/10.58
VC 1	13/0.51	124/4.88	72/2.83	123/4.84	15.5/0.61	84/3.31	72/2.83	35/1.38	16.0/0.63	M 8	35	7.0/15.43
VC 3	18/0.71	170/6.69	89/3.50	140/5.51	46.5/1.83	46/1.81	95/3.74	50/1.97	25.0/0.98	M 12	120	15.9/35.05
VC 5	22/0.87	170/6.69	105/4.13	156/6.14	46.5/1.83	46/1.81	95/3.74	50/1.97	25.0/0.98	M 12	120	18.7/41.23

* electronics version H: plus 12 mm / 0.47 inch
electronics version X: plus 6 mm / 0.24 inch

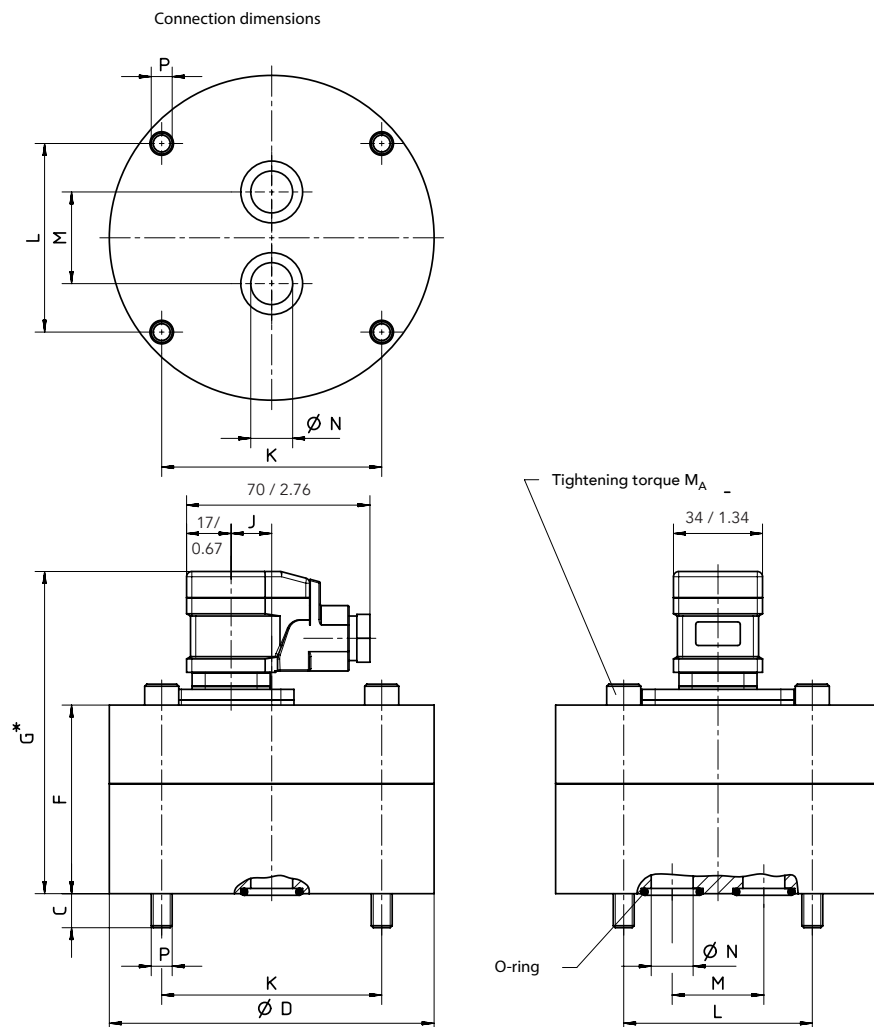


Dimensions

I Stainless steel version – plate mounting


Electronics versions: high-temperature Plus / high-temperature Plus ATEX/IECEx / low-temperature

Nominal size	Dimensions										Tightening torque	Weight
	C	D	F	G	J	K	L	M	N	P	Nm	kg/lbs
											M _A	m
VC 0.025	10/0.39	94/3.70	55/2.17	92/3.62	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	3.0/6.61
VC 0.04	9/0.35	94/3.70	56/2.20	93/3.66	-	70/2.76	40/1.57	20/0.79	6.7/0.26	M 6	14	3.0/6.61
VC 0.1	10/0.39	94/3.70	55/2.17	92/3.62	-	70/2.76	40/1.57	20/0.79	9.0/0.35	M 6	14	3.0/6.61
VC 0.2	13/0.51	94/3.70	57/2.24	94/3.70	-	70/2.76	40/1.57	20/0.79	9.0/0.35	M 6	14	3.1/6.83
VC 0.4	17/0.67	118/4.65	63/2.48	100/3.94	-	80/3.15	38/1.50	34/1.34	16.0/0.63	M 8	35	4.8/10.58
VC 1	13/0.51	124/4.88	72/2.83	109/4.29	18.5/0.73	84/3.31	72/2.83	35/1.38	16.0/0.63	M 8	35	7.0/15.43
VC 3	18/0.71	170/6.69	89/3.50	126/4.96	11.0/0.43	46/1.81	95/3.74	50/1.97	25.0/0.98	M 12	120	15.9/35.05
VC 5	22/0.87	170/6.69	105/4.13	142/5.59	11.0/0.43	46/1.81	95/3.74	50/1.97	25.0/0.98	M 12	120	18.7/41.22

Connection dimensions

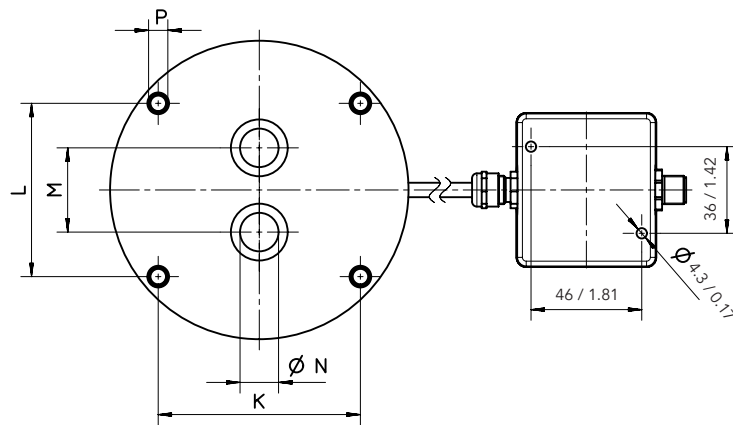

Length as per customer requirement

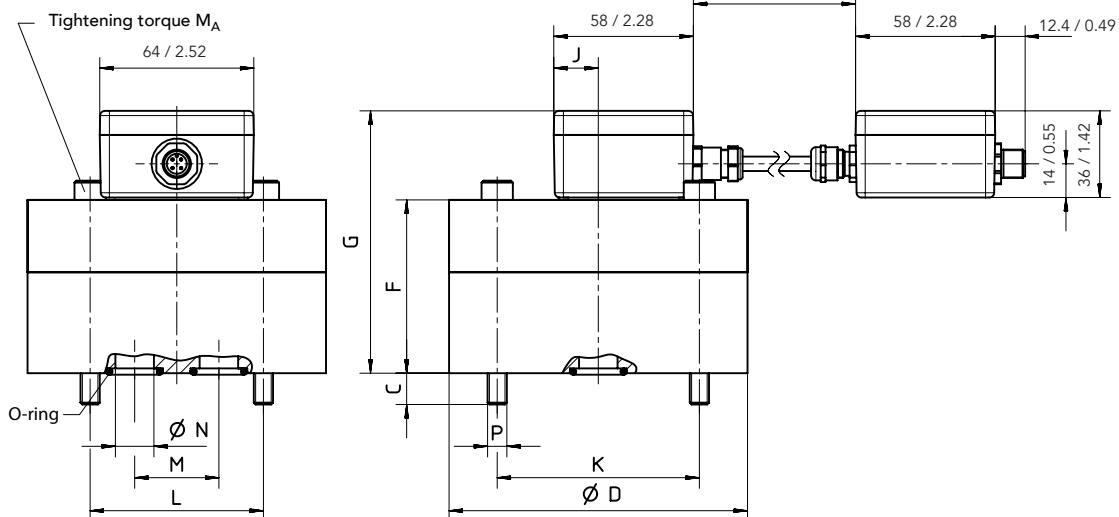


Dimensions

I Stainless steel version – pipe connection

Electronics versions: standard / high-temperature / ATEX/IECEX / IO-Link

Nominal size	Dimensions												Weight	
	A	B	C	D	E	F	G*	H	J	K	L	R	m	kg/lbs
VC 0.025	G 1/8	9/0.35	17/0.67	94/3.70	90/3.54	55/2.17	106/4.17	15.0/0.59	-	70/2.76	40/1.57	6.7/0.26	3.0/6.61	
VC 0.04	G 1/4	13/0.51	21/0.83	94/3.70	90/3.54	56/2.20	107/4.21	15.0/0.59	-	70/2.76	40/1.57	6.7/0.26	3.0/6.61	
VC 0.1	G 3/8	13/0.51	25/0.98	94/3.70	90/3.54	55/2.17	106/4.17	15.0/0.59	-	70/2.76	40/1.57	6.6/0.259	3.0/6.61	
VC 0.2	G 3/8	13/0.51	25/0.98	94/3.70	90/3.54	57/2.24	108/4.25	16.0/0.62	-	70/2.76	40/1.57	6.5/0.25	3.1/6.83	
VC 0.4	G 1/2	15/0.59	29/1.14	118/4.65	114/4.49	63/2.48	114/4.49	17.5/0.69	-	80/3.15	38/1.50	9.0/0.35	4.8/10.58	
VC 1	G 1/2	15/0.59	29/1.14	124/4.88	120/4.79	72/2.83	123/4.84	22.0/0.87	15.5/0.61	84/3.31	72/2.83	9.0/0.35	7.0/15.43	
VC 3	G 1	19/0.75	51.5/2.03	170/6.69	162/6.38	89/3.50	140/5.51	30.0/1.18	46.5/1.83	46/1.81	95/3.74	13.0/0.51	15.9/35.05	
VC 5	G 1	19/0.75	42/1.65	170/6.69	162/6.38	105/4.13	156/6.14	30.0/1.18	46.5/1.83	46/1.81	95/3.74	13.0/0.51	18.7/41.23	

* electronics version H: plus 12 mm / 0.47 inch
electronics version X: plus 6 mm / 0.24 inch

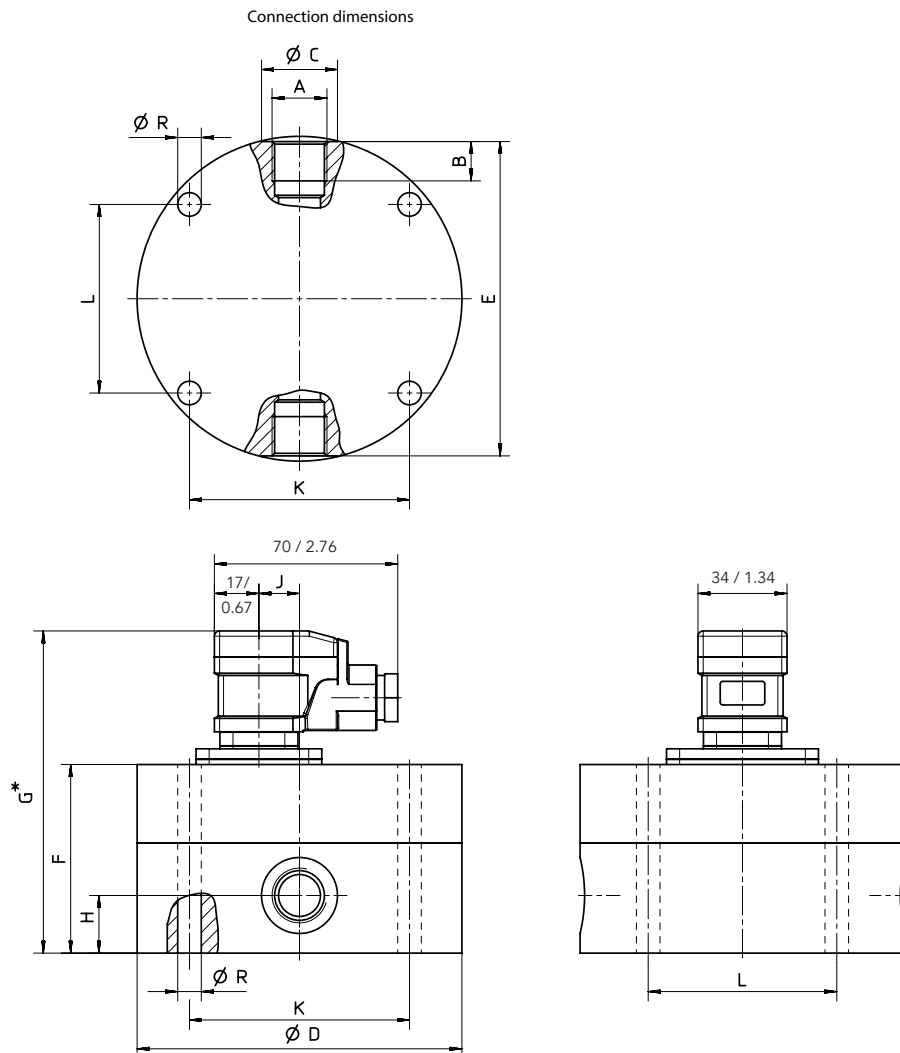


Dimensions

I Connection plates (cast iron) with lateral threaded connection

Ordering code	Dimensions																		Weight	
	e	A	B	C	E	F	G	H	J	K	L	M	N	P	R	c	d	f	m	
MVC 0.2 R3 B05*	G 3/8	85/ 3.35	90/ 3.54	35/ 1.38	65/ 2.56	76/ 3.00	7/ 0.28	11/ 0.43	7/ 0.28	70/ 2.76	40/ 1.57	20/ 0.79	6.5/ 0.26	M 6/14 deep M 6/0.55 deep	17/ 0.67	0.7/ 0.03	25/ 0.98	13/ 0.51	1.8/3.97	
MVC 0.2 R3 C05*	G 1/2	85/ 3.35	90/ 3.54	35/ 1.38	65/ 2.56	76/ 3.00	7/ 0.28	11/ 0.43	7/ 0.28	70/ 2.76	40/ 1.57	20/ 0.79	6.5/ 0.26	M 6/14 deep M 6/0.55 deep	17.5/ 0.69	0.7/ 0.03	29/ 1.14	15/ 0.59	1.7/3.75	
MVC 0. R1 C09	G 1/2	100/ 3.94	110/ 4.33	37/ 1.46	86/ 3.39	96/ 3.78	7/ 0.28	11/ 0.43	7/ 0.28	80/ 3.15	38/ 1.50	34/ 1.34	16/ 0.63	M 8/18 deep M 8/0.71 deep	18.5/ 0.73	0.7/ 0.03	29/ 1.14	15/ 0.59	2.7/5.95	
MVC 0. R1 D09	G 3/4	100/ 3.94	110/ 4.33	42/ 1.65	86/ 3.39	96/ 3.78	7/ 0.28	11/ 0.43	7/ 0.28	80/ 3.15	38/ 1.50	34/ 1.34	16/ 0.63	M 8/18 deep M 8/0.71 deep	21/ 0.083	1.0/ 0.04	36/ 1.42	17/ 0.69	2.9/6.39	
MVC 1 R2 C05	G 1/2	100/ 3.94	120/ 4.72	37/ 1.46	80/ 3.15	106/ 4.17	7/ 0.28	11/ 0.43	7/ 0.28	84/ 3.31	72/ 2.83	35/ 1.38	12/ 0.47	M 8/18 deep M 8/0.71 deep	17.5/ 0.69	0.7/ 0.03	29/ 1.14	15/ 0.59	2.9/6.39	
MVC 1 R3 D05	G 3/4	120/ 4.72	120/ 4.72	42/ 1.65	80/ 3.15	106/ 4.17	7/ 0.28	11/ 0.43	7/ 0.28	84/ 3.31	72/ 2.83	35/ 1.38	13/ 0.59	M 8/18 deep M 8/0.71 deep	21/ 0.83	1.0/ 0.04	36/ 1.42	17/ 0.59	4.0/8.82	
MVC 1 R2 E05	G 1	100/ 3.94	120/ 4.72	65/ 2.56	80/ 3.15	106/ 4.17	7/ 0.28	11/ 0.43	8/ 0.32	84/ 3.31	72/ 2.83	35/ 1.38	13/ 0.59	M 8/18 deep M 8/0.71 deep	32.5/ 1.28	1.0/ 0.04	42/ 1.65	19/ 0.75	4.9/10.80	
MVC 5 R2 E05**	G 1	160/ 6.30	165/ 6.50	80/ 3.15	140/ 5.51	145/ 5.71	9/ 0.35	15/ 0.59	9/ 0.35	46/ 1.81	95/ 3.74	50/ 1.97	25/ 0.98	M 12/24 deep M 12/0.94 deep	28/ 1.10	1.0/ 0.04	42/ 1.65	19/ 0.75	14.0/30.86	
MVC 5 R2 G09**	G 1 1/2	170/ 6.70	165/ 6.50	100/ 3.94	140/ 5.51	145/ 5.71	9/ 0.35	15/ 0.59	9/ 0.35	46/ 1.81	95/ 3.74	50/ 1.97	25/ 0.98	M 12/24 deep M 12/0.94 deep	42/ 1.65	1.0/ 0.04	58/ 2.28	23/ 0.91	17.8/39.24	

* suitable for VC 0.025, VC 0.04, VC 0.1, VC 0.2 and VC with 0.2 encoder

** suitable for VC 3 and VC 5

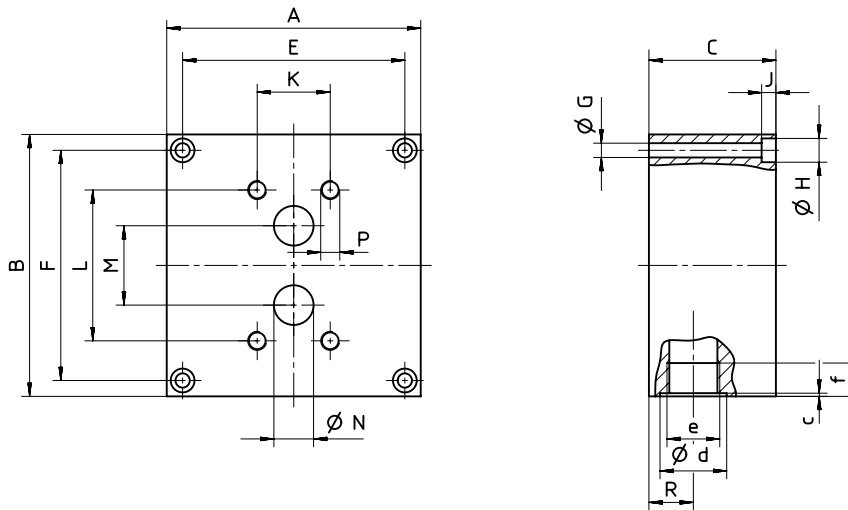


Dimensions

I Connection plates (cast iron) with rear threaded connection

Ordering code	Dimensions																		Weight	
	e	A	B	C	E	F	G	H	J	K	L	M	N	P	R	c	d	f	m	
MVC 0.2 R3 B04*	G 3/8	85/ 3.35	90/ 3.54	35/ 1.38	65/ 2.56	76/ 2.99	7/ 0.28	11/ 0.43	7/ 0.28	70/ 2.76	40/ 1.57	20/ 0.79	6.5/ 0.26	M 6/14 deep M 6/0.55 deep	28/ 1.10	0.7/ 0.03	25/ 0.98	13/ 0.51	1.6/3.53	
MVC 0.4 R1 C08	G 1/2	100/ 3.94	110/ 4.33	37/ 1.46	86/ 3.39	96/ 3.78	7/ 0.28	11/ 0.43	7/ 0.28	80/ 3.15	38/ 1.50	34/ 1.34	16/ 0.63	M 8/18 deep M 8/0.71 deep	46/ 1.81	0.7/ 0.03	29/ 1.14	15/ 0.59	2.5/5.51	
MVC 0.4 R1 D08	G 3/4	100/ 3.94	110/ 4.33	42/ 1.65	86/ 3.39	96/ 3.78	7/ 0.28	11/ 0.43	7/ 0.28	80/ 3.15	38/ 1.50	34/ 1.34	16/ 0.63	M 8/18 deep M 8/0.71 deep	52/ 2.05	1/ 0.04	36/ 1.42	17/ 0.67	2.9/6.39	
MVC 1 R2 C04	G 1/2	100/ 3.94	120/ 4.72	37/ 1.46	80/ 3.15	106/ 4.17	7/ 0.28	11/ 0.43	7/ 0.28	84/ 3.31	72/ 2.83	35/ 1.38	12/ 0.47	M 8/18 deep M 8/0.71 deep	50/ 1.97	0.7/ 0.03	29/ 1.14	15/ 0.59	2.7/5.95	
MVC 5 R2 E04**	G 1	160/ 6.30	165/ 6.50	55/ 2.17	140/ 5.51	145/ 5.71	9/ 0.35	15/ 0.59	9/ 0.35	46/ 1.81	95/ 3.74	50/ 1.97	25/ 0.98	M 12/24 deep M 12/0.94 deep	55/ 2.17	1/ 0.04	42/ 1.65	19/ 0.75	9.6/21.16	

* suitable for VC 0.025, VC 0.04, VC 0.1, VC 0.2 and VC with 0.2 encoder

** suitable for VC 3 and VC 5

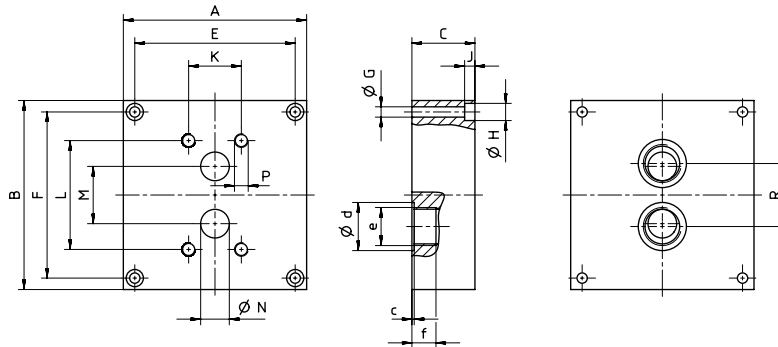


I Connection plates (stainless steel) with lateral threaded connection

Ordering code	Dimensions																Weight	
	e	B	C	D	E	G	H	J	K	L	M	N	P	R	f	m		
MVC 0.2 R4 B11*	G 3/8	85/ 3.35	35/ 1.38	94/ 3.70	75/ 2.95	77/ 0.28	11/ 0.43	77/ 0.28	70/ 2.76	40/ 1.57	20/ 0.79	6.5/ 0.26	M 6/14 deep M 6/0.55 deep	18.0/ 0.71	13/ 0.51	1.7/3.75		
MVC 1 R3 C11	G 1/2	116/ 4.57	37/ 1.46	124/ 4.88	100/ 3.94	9.0/ 0.35	15/ 0.59	9.0/ 0.35	84/ 3.31	72/ 2.83	35/ 1.38	12.0/ 0.47	M 8/18 deep M 8/0.71 deep	19.5/ 0.77	15/ 0.59	3.2/7.05		
MVC 1 R2 D11	G 3/4	116/ 4.57	42/ 1.65	124/ 4.88	100/ 3.94	9.0/ 0.35	15/ 0.59	9.0/ 0.35	84/ 3.31	72/ 2.83	35/ 1.38	12.0/ 0.47	M 8/18 deep M 8/0.71 deep	21.0/ 0.83	17/ 0.67	3.5/7.72		
MVC 5 R2 E11**	G 1	158/ 6.22	80/ 3.15	170/ 6.69	140/ 5.51	9.0/ 0.35	15/ 0.59	9.0/ 0.35	46/ 1.81	95/ 3.74	50/ 1.97	25.0/ 0.98	M 12/24 deep M 12/0.94 deep	52.0/ 2.05	19/ 0.75	13.9/30.64		
MVC 5 R2 G11**	G 1 1/2	158/ 6.22	105/ 4.13	170/ 6.69	140/ 5.51	9.0/ 0.35	15/ 0.59	9.0/ 0.35	46/ 1.81	95/ 3.74	50/ 1.97	25.0/ 0.98	M 12/24 deep M 12/0.94 deep	63.0/ 2.48	23/ 0.91	17.9/39.46		

* suitable for VC 0.025, VC 0.04, VC 0.1, VC 0.2 and VC with 0.2 encoder

** suitable for VC 3 and VC 5

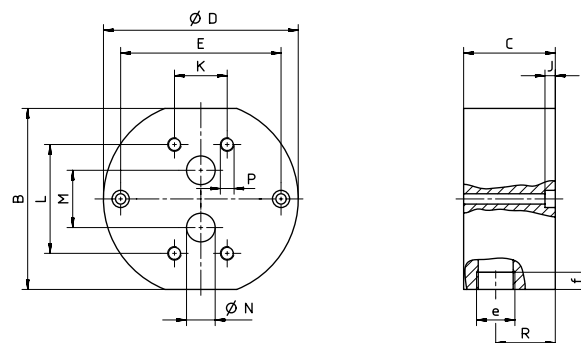


Dimensions in mm / inch

Dimensions

I Connection plates (spheroidal cast iron) with lateral SAE flange connection for VC 3 and 5 in K3 specification

Ordering code	Dimensions																Weight
	B	C	D	E	F	G	K	L	M	N	P	R	a	b	e	f	m
MVC 5 V1 E09	150/ 5.91	90/ 3.54	180/ 7.09	110/ 4.33	110/ 4.33	M 8/24 deep M 8/0.94 deep	46/ 1.81	95/ 3.74	50/ 1.97	25/ 0.98	M 12/24 deep M 12/0.94 deep	50/ 1.97	57.2/ 2.25	27.8/ 1.09	25/ 0.98	M 12/24 deep M 12/0.94 deep	14.2/ 31.31
MVC 12 V1 G09	200/ 7.87	140/ 5.51	249/ 9.80	120/ 4.72	140/ 5.51	M 10/20 deep M 10/0.79 deep	120/ 4.72	140/ 5.51	70/ 2.76	38/ 1.50	M 20/45 deep M 20/1.77 deep	70/ 2.76	79.38/ 3.13	36.5/ 1.44	38/ 1.50	M 16/25 deep M 16/0.98 deep	41.18/ 90.79

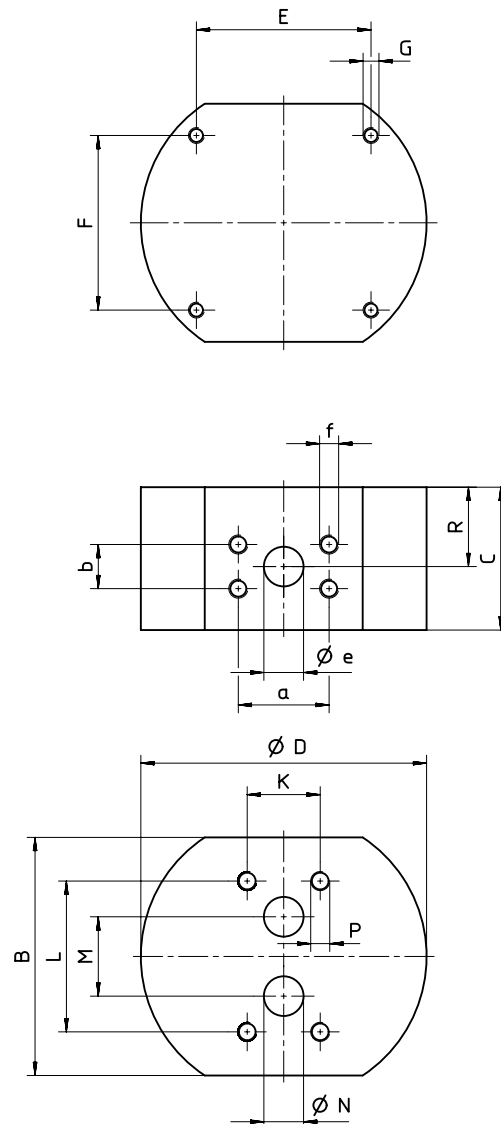

KRACHT[®]

KRACHT CORP.

6552 Weatherfield Court · Maumee, OH 43537 · USA
P +1 419 874 1000 · F +1 419 874 1006
pumps@krachtcorp.com · www.krachtcorp.com

VC/US/03.2024

Errors and technical changes reserved